2SC1740M

Rev.F Apr.-2017

蓝箭电子 BLUE ROCKET ELECTRONICS

DATA SHEET

/ Descriptions

SOT-23 NPN Silicon NPN transistor in a SOT-23 Plastic Package.

/ Features

, 2SA933M

Small base output capacitance, complementary pair with 2SA933M.

/ Applications

General purpose amplifier.

/ Equivalent Circuit



/ Pinning



PIN1 Base PIN 2 Emitter PIN 3 Collector

/ h_{FE} Classifications & Marking

h_{FE} Classifications Symbol	Q	R	S
h_{FE} Range	120 270	180 390	270 560
Marking	BQH	BRH	BSH

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	60	V
Collector to Emitter Voltage	V_{CEO}	50	V
Emitter to Base Voltage	V_{EBO}	7.0	V
Collector Current	I_C	150	mA
Collector Power Dissipation	P_C	250	mW
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector-Base Breakdown Voltage	V_{CBO}	I_C=50μA I_E=0	60			V
Collector-Emitter Breakdown Voltage	V_{CEO}	I_C=1.0mA I_B=0	50			V
Emitter-Base Breakdown Voltage	V_{EBO}	I_E=50μA I_C=0	7.0			V

Pt@,X eq8È[° Break48001 re.b>T6n40n8/TT9-515.4557

/ Electrical Characteristic Curve



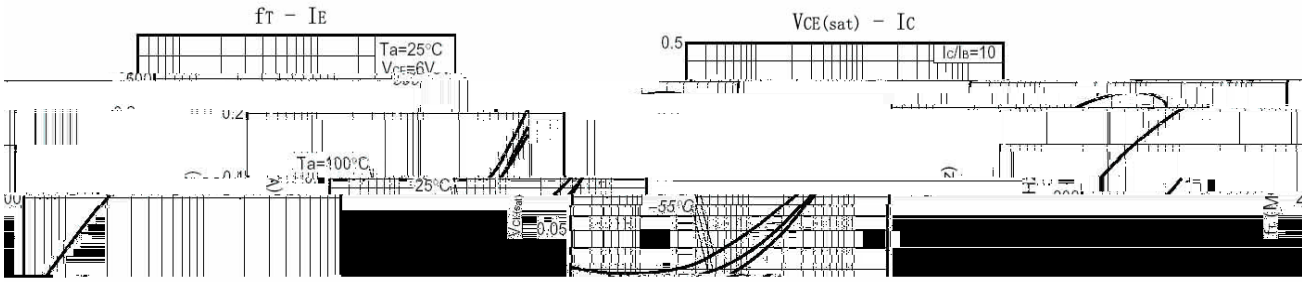

/ Package Dimensions

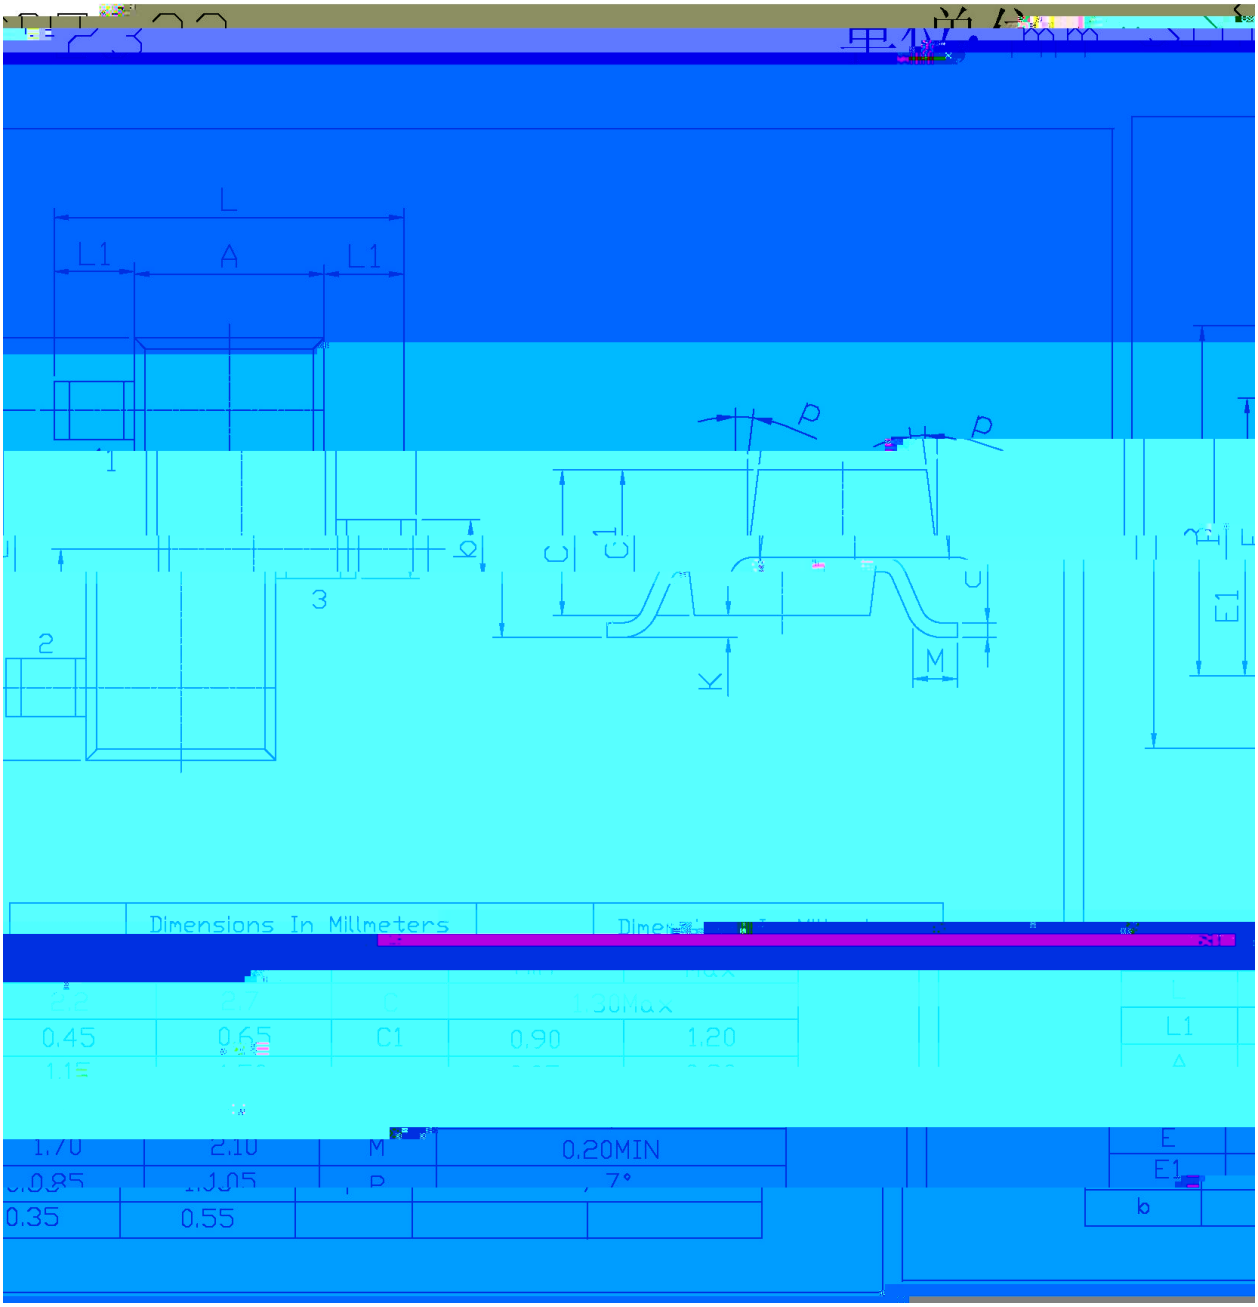

/ Marking Instructions

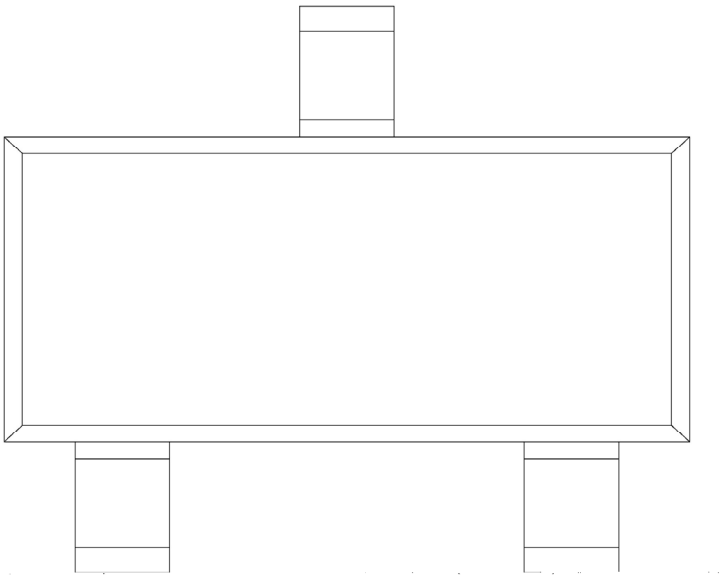

B

Q: h_{FE}

( ) /

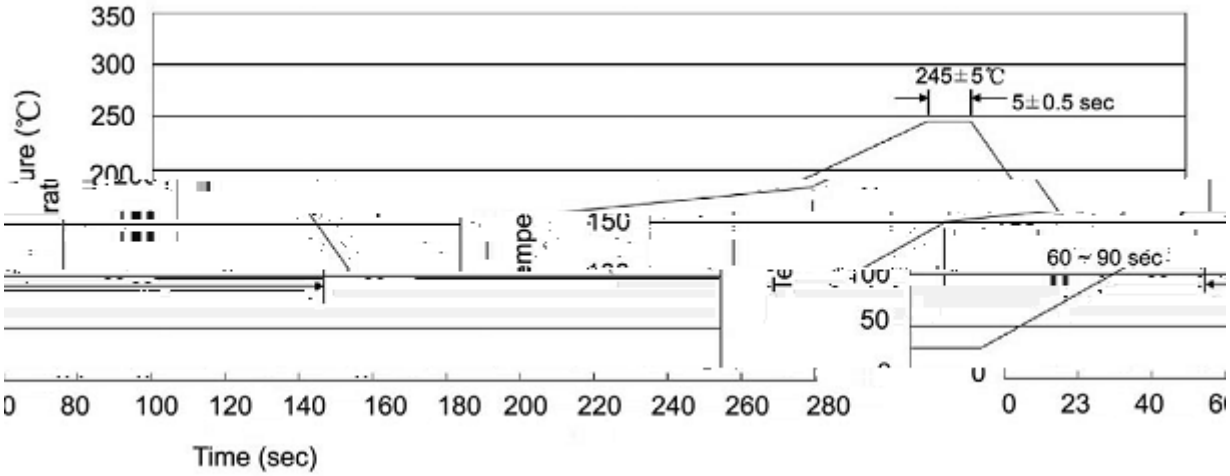

Note:

1 25 150 60 90sec;

1.Preheating:25~150 , Time:60~90sec.

2 245±5 5±0.5sec;

2.Peak Temp.:245±5 , Duration:5±0.5sec.

3 2 10 /sec.

3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm^3)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-23	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices