2SC2230(A)

DATA SHEET

/ Descriptions

WR0<50 P Ṃ Ṃ Ŀ QSQ Æ Ṁ ч s ‖ ˥

/ Features

Y FHR ㄨ/´ ‖ ɔ ‖ ɯ ` ㄨ

/ Applications

ᵀ̂ᵒ̂ᵒ̂ ˝ ᵕ̇ ㄨ я ᵕ̈ ᶻ/Ẽ ɔ Ɣ ˏ ᵓ̣

/ Equivalent Circuit



/ Pinning



X X X

/ h_{FE} Classifications & Marking

/ Electrical Characteristic Curve

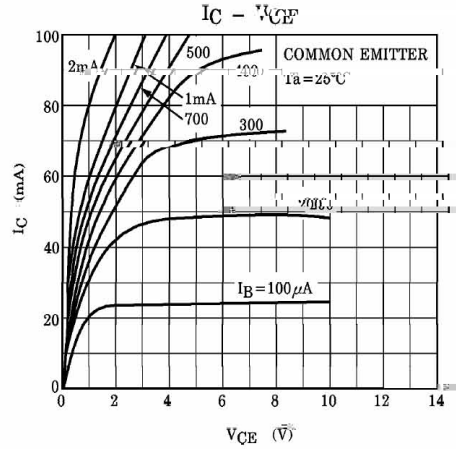

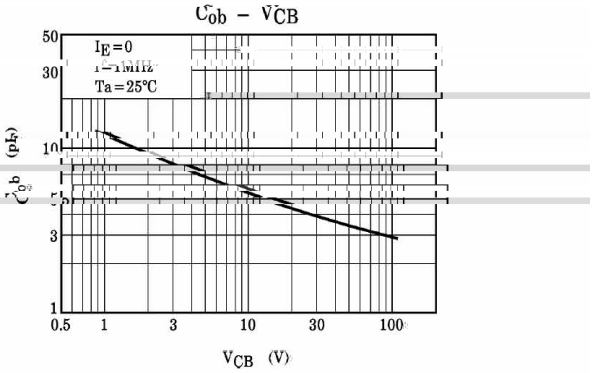

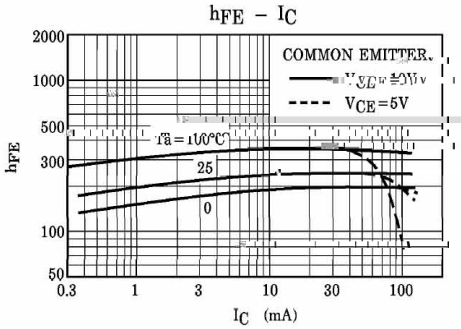

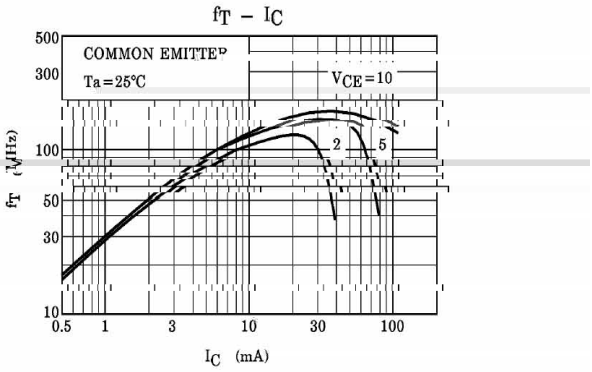

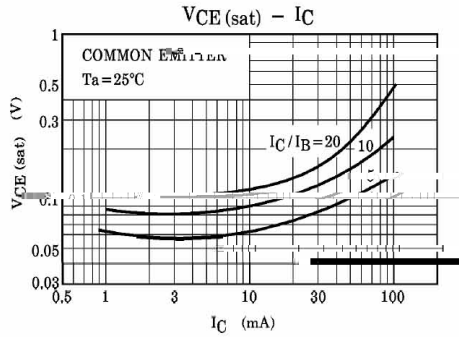

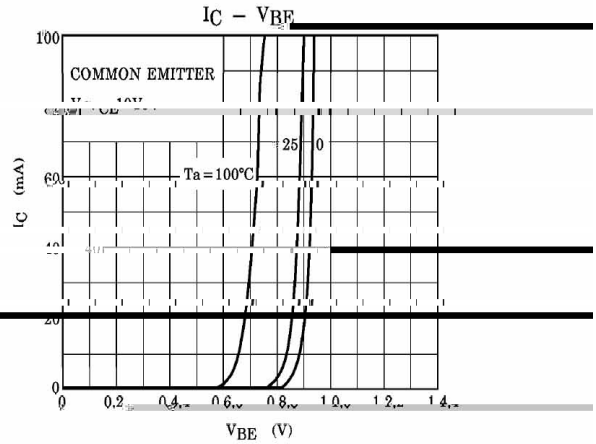

/ Package Dimensions

TO-92LM Unit: mm

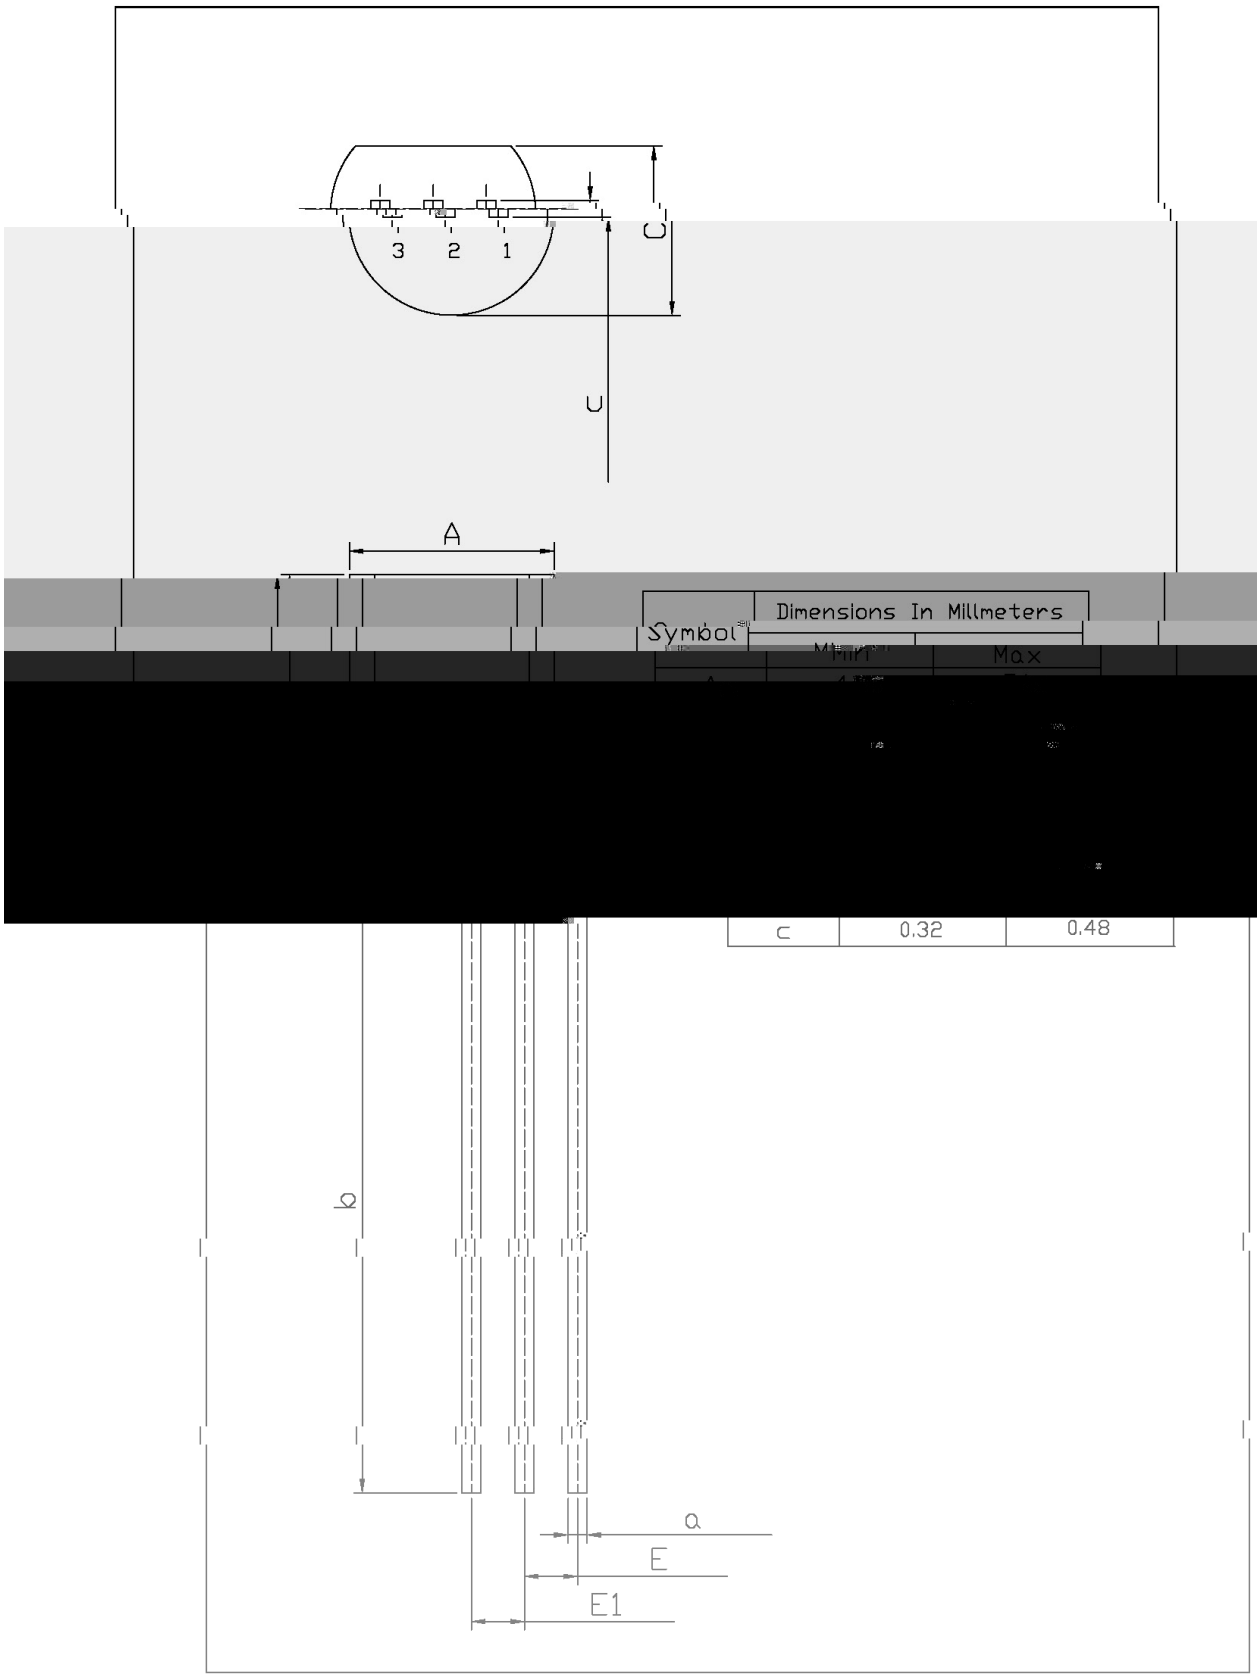

/ Marking Instructions

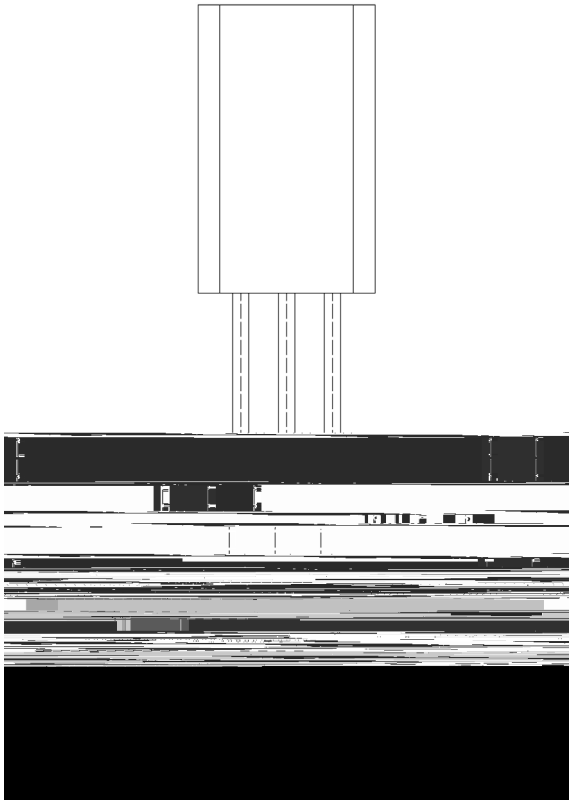

ب ˝ χ

EU=

F5563D χ

\=

---- χ

( ) / Temperature Profile for Dip Soldering(Pb-Free)

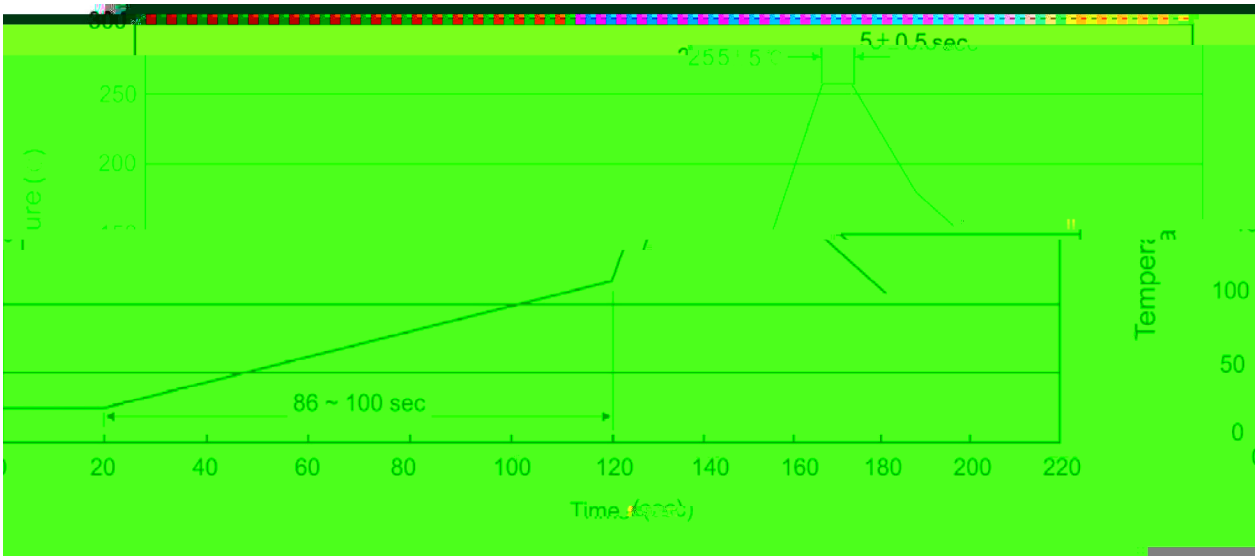

ب ˝ χ

ʃ ♬ □ ỷ Ḱ ɫ ı ̀H ɮ Ḱ ɫ

Š Ö □ ỷ ° ɫ ı ̀H ɮ ̀Y ⺈ ⺾ ° ° ɫ °

ì ̇ ⺈ ˛ ɔ ﻫ ỷ ⺾ Ḱ ɫ ɫ

/ Resistance to Soldering Heat Test Conditions

□ ỷ χ ° ɫ ̀H ɮ χ °

/ Packaging SPEC.

̈Ω ţ ɣ ɫ

封装形式	包装数量					包装尺寸 :		
	只袋	袋盒	只盒	盒箱	只箱	袋	盒	箱