VRW056 ṂṂ Ł QSQ ÆṀ ɥ s ǁ ˥ Silicon NPN transistor in a SOT-23 Plastic Package.

ɾ ᵇ ɵ ɟ ɔ ḳ ṇ / ʒ ᵠ ˧˩ ˝Ω̣ Ḥ̣

Small reverse transfer capacitance, low noise figure.

ᵻ̂ ̂ ̂ ɔ ɭ ̣ ω̣ ᶻ

High frequency amplifier applications.





PIN1

v ̈Ω Parameter	ϟ N Symbol	̈Ω Ö Rating	D Ӈ Unit
Collector to Base Voltage	V_{CBO}	40	V
Collector to Emitter Voltage	V_{CEO}	30	V
Emitter to Base Voltage	V_{EBO}	4.0	V
Collector Current	I_C	20	mA
Emitter Current	I		

/ Package Dimensions

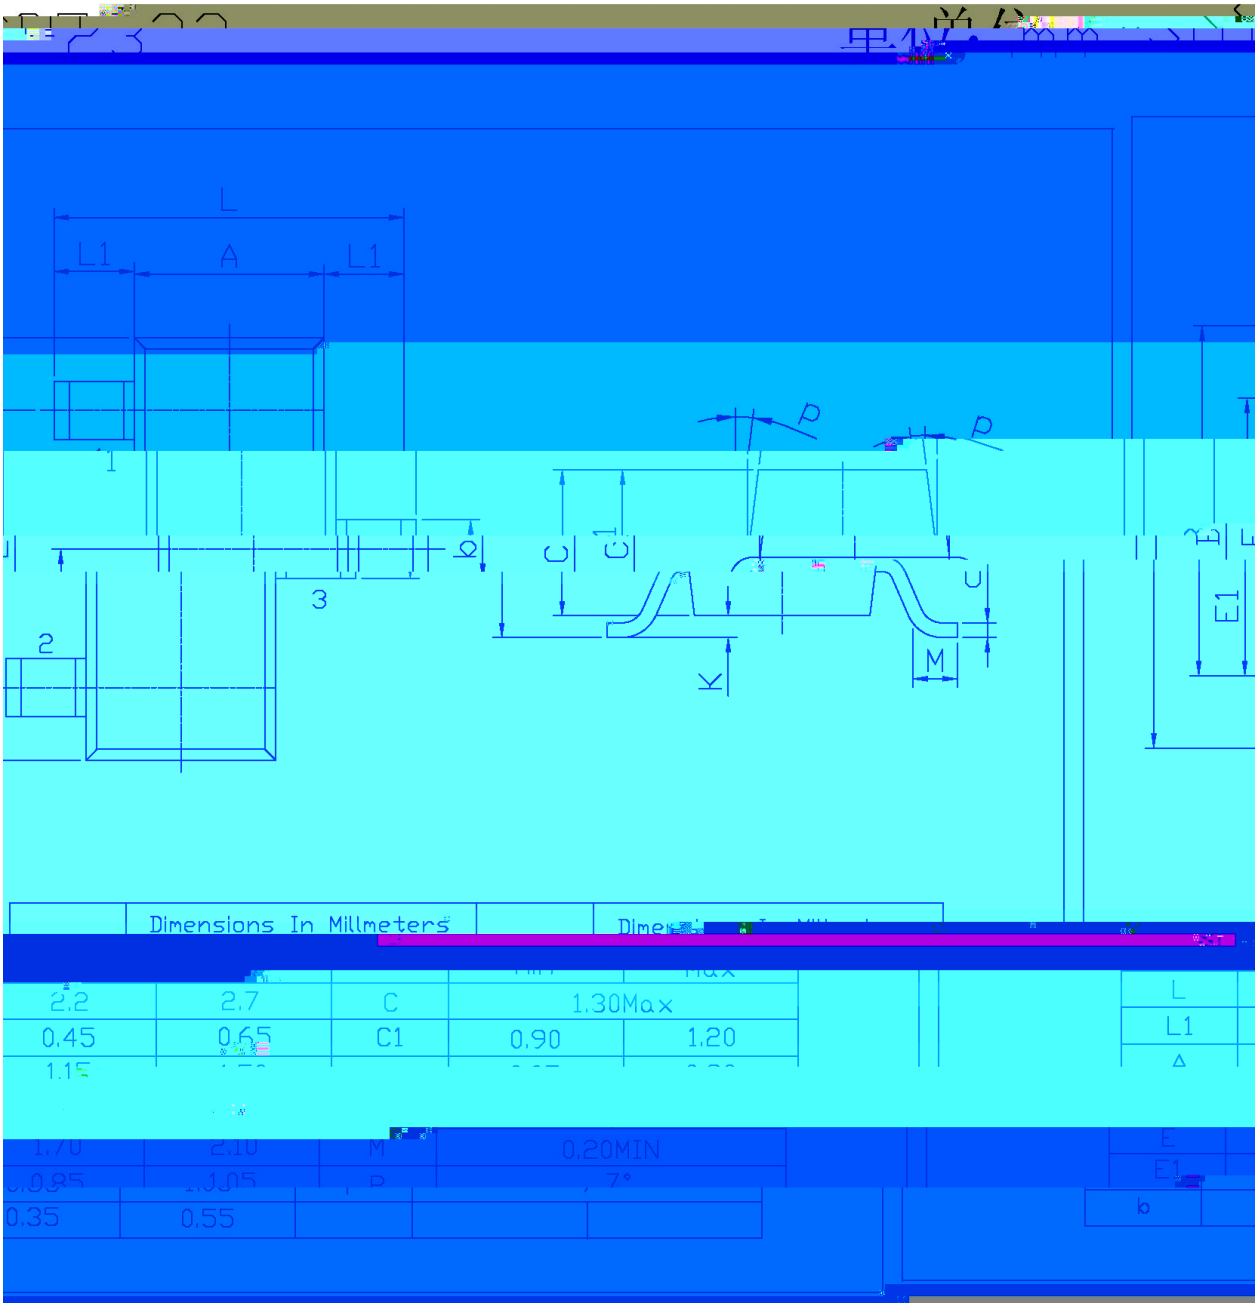

/ Marking Instructions

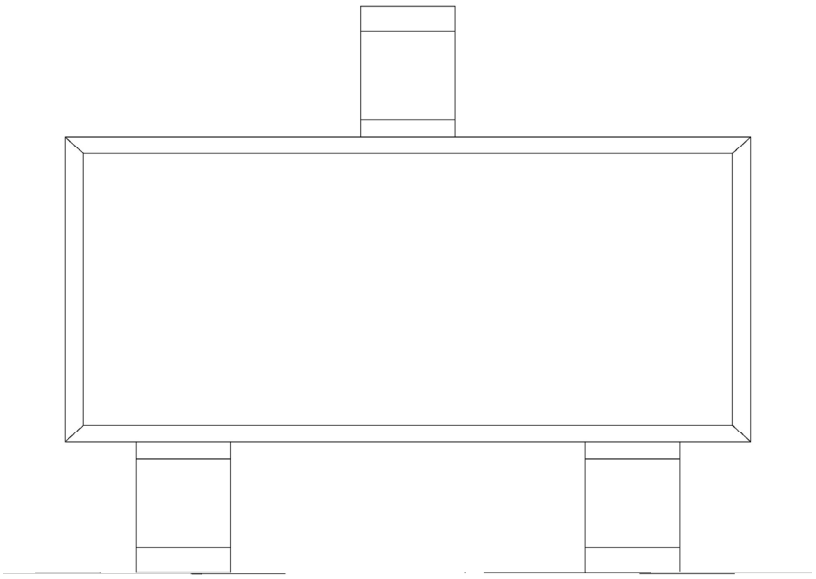

ب ˝ χ

K χ ѭ ʒ ᴵ Ɱ

T χ ѭ ʒ ᴺ Ɱ

U χ ѭ h_{FE} ⁶ ₭ Ɱ

Note:

K χ Company

7y

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

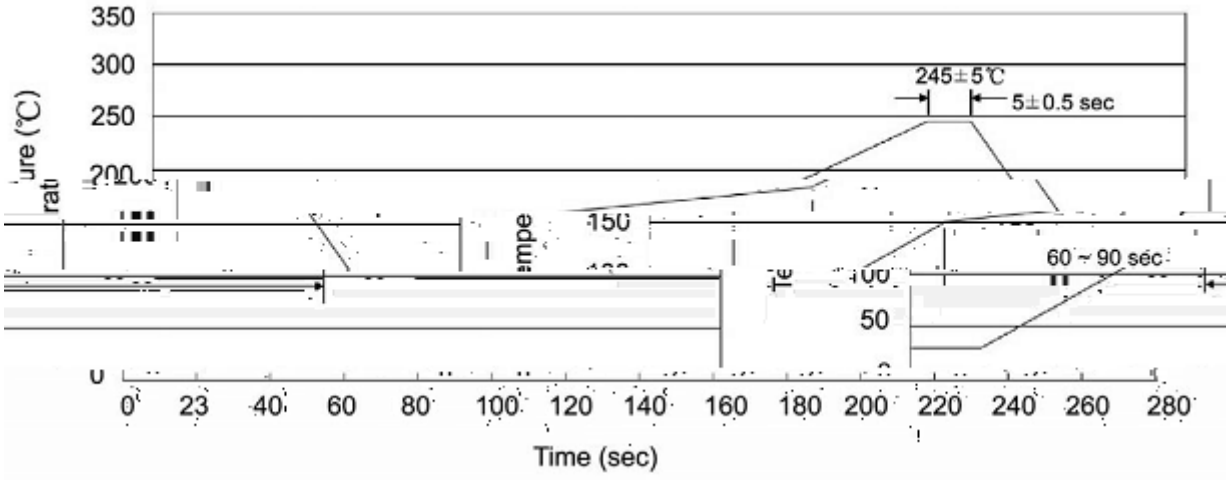

ب ˝ χ

1 ℓ ♬ □ ỷ 25 Ḱ 150 ɫ ı `H ڑ 60 Ḱ 90sec;

2 Š Ö □ ỷ 245 ° 5 ɫ ı `H ڑ ˋY ⺈ ⺾ 5 ° 0.5sec;

3 ì ˙ ⺈ ˛ ɔ ⺾ ỷ ⺾ 2 Ḱ 10 ɫ /sec.

Note:

1.Preheating:25~150 ɫ , Time:60~90sec.

2.Peak Temp.:245 ° 5 ɫ , Duration:5 ° 0.5sec.

3. Cooling Speed: 2~10 ɫ /sec.

/ Resistance to Soldering ⓑ Test Conditions

□ ỷ χ 260 ° 5 ɫ `H ڑ χ 10 ° 1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

ɔ` γ ⊢ / REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm^3)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-23	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices