## / Absolute Maximum Ratings(Ta=25 )

| | | | |
|---|---|---|---|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

## / Electrical Characteristics(Ta=25 )

| | | | | | | |
|---|---|---|---|---|---|---|
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | μ |
| | | | | | | μ |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

## / Electrical Characteristic Curve

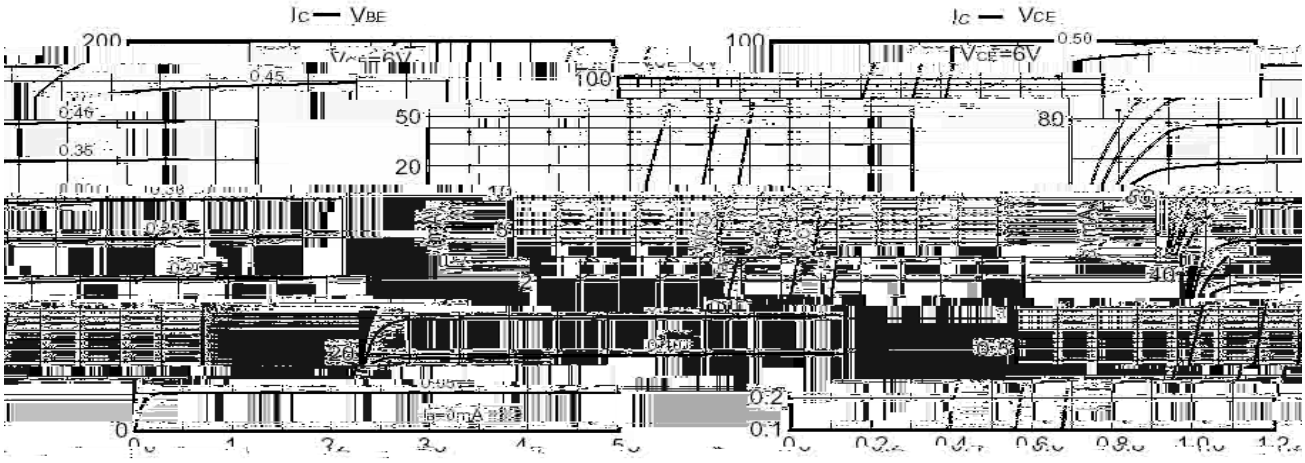


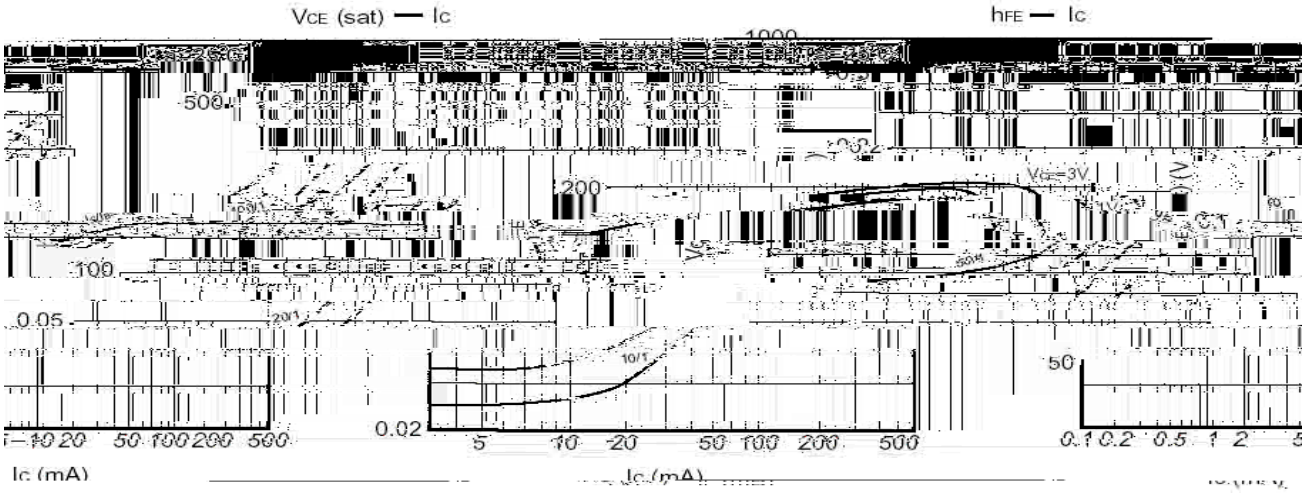


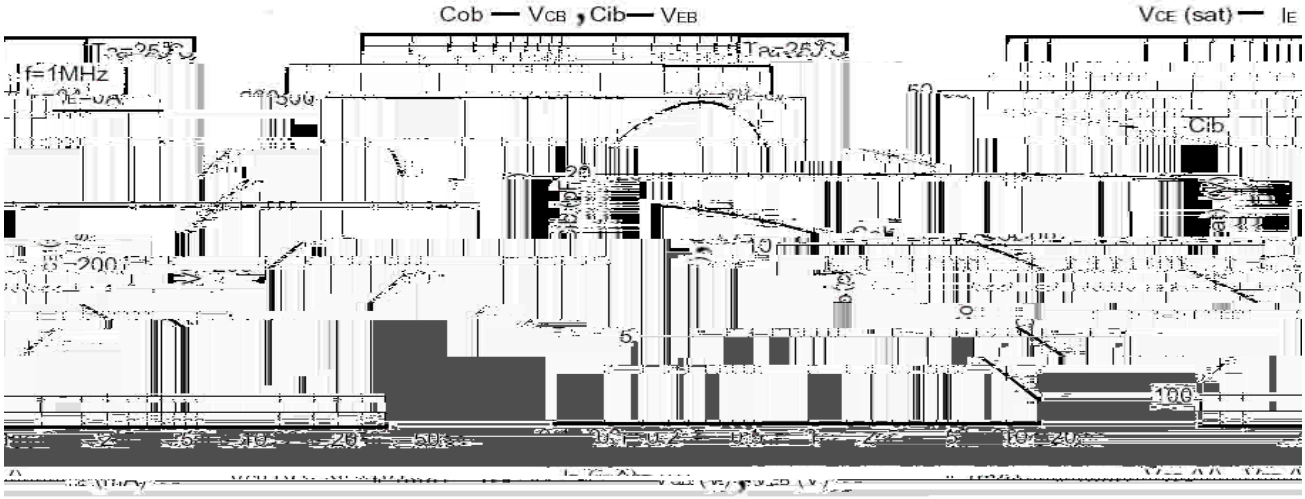

## / Package Dimensions

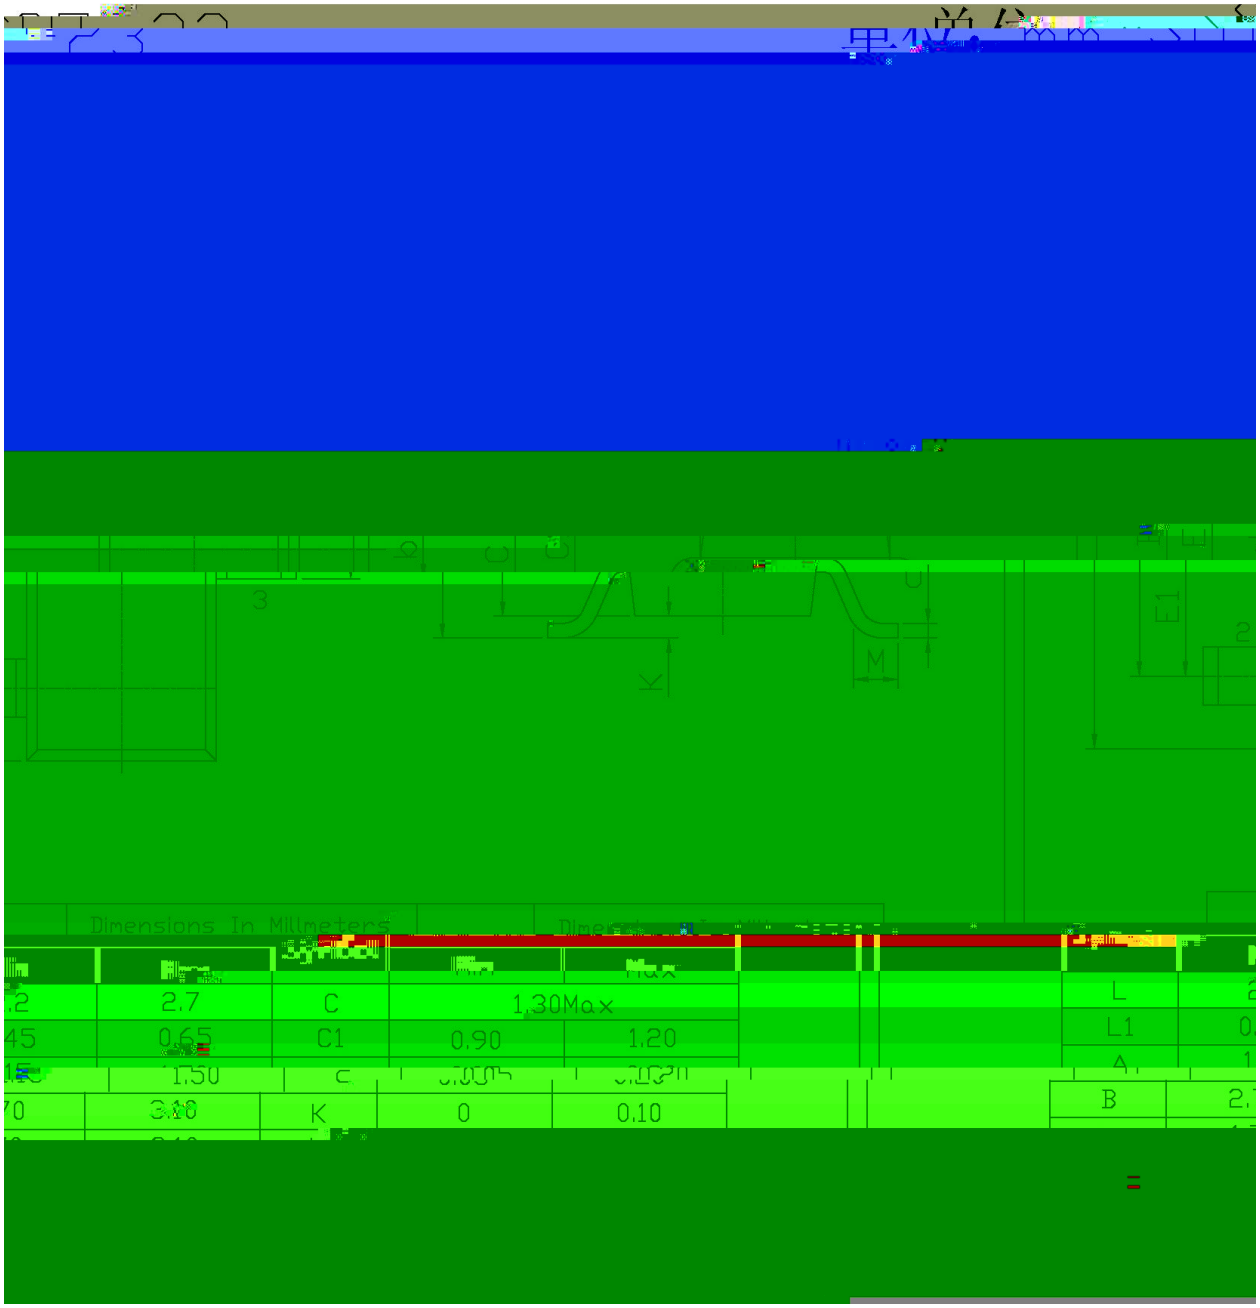

## / Marking Instructions

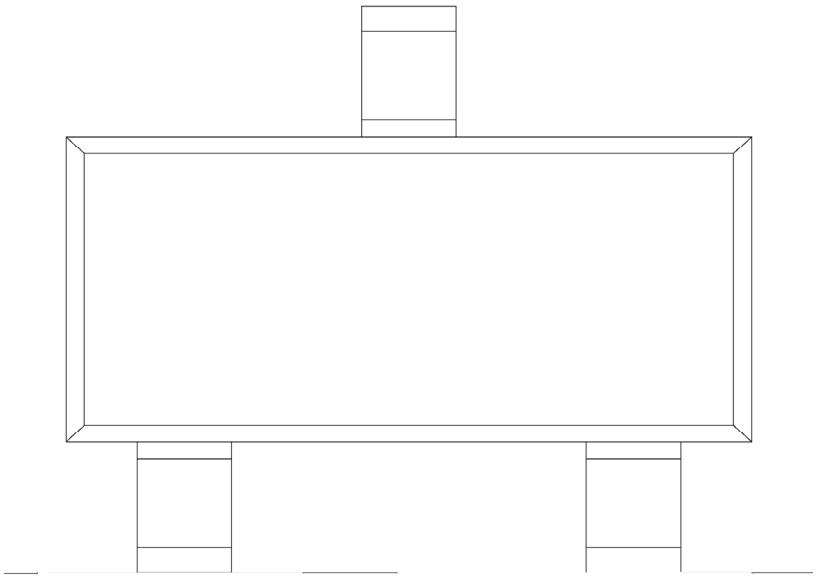

H

Y

Q:

## ( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

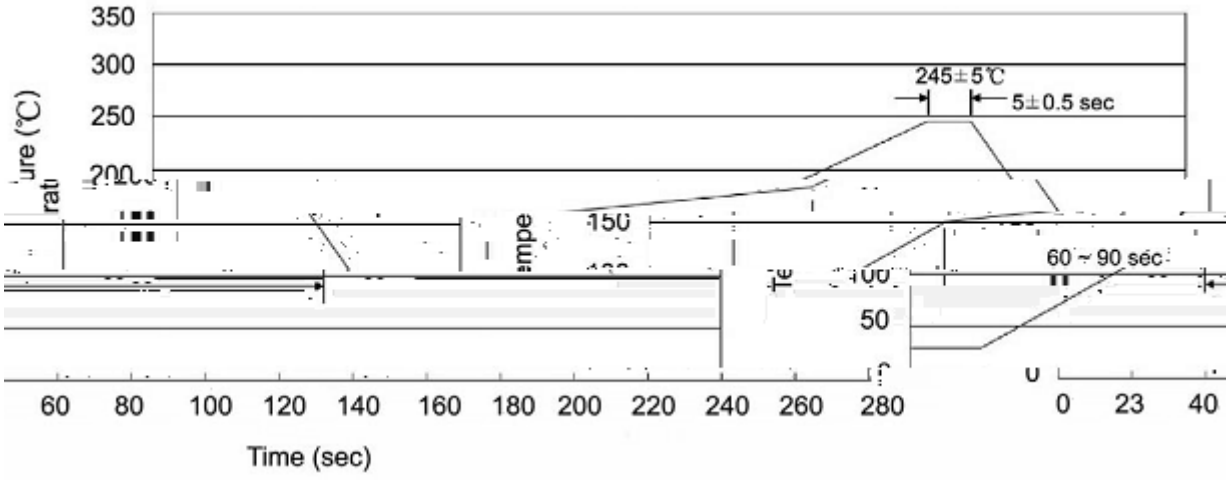


± ± ± ±

## / Resistance to Soldering Heat Test Conditions

± ±

## / Packaging SPEC.

| 封装形式 | 包装数量 | | | | | 包装尺寸 : | | |
|---|---|---|---|---|---|---|---|---|
| | Units/Reel 只/卷盘 | Reels/Inner Box 卷盘/盒 | Units/Inner Box 只/盒 | Inner Boxes/Outer Box 盒/箱 | Units/Outer Box 只/箱 | Reel | Inner Box 盒 | Outer Box 箱 |
| SOT-23 | 3,000 | 10 | 30,000 | 6 | 180,000 | 7 ×8 | 180×120×180 | 390×385×205 |

## / Notices