TO-126F PNP Silicon PNP transistor in a TO-126F Plastic Package.

, h_{FE}
Low saturation voltage, excellent h_{FE} linearity and high h_{FE}.

.
Audio frequency amplifier,ag regulatoe.

Parameter	Symbol	Rating	Unit
Collector to Base Voltage Vse Voltage			

/ Electrical Characteristic Curve

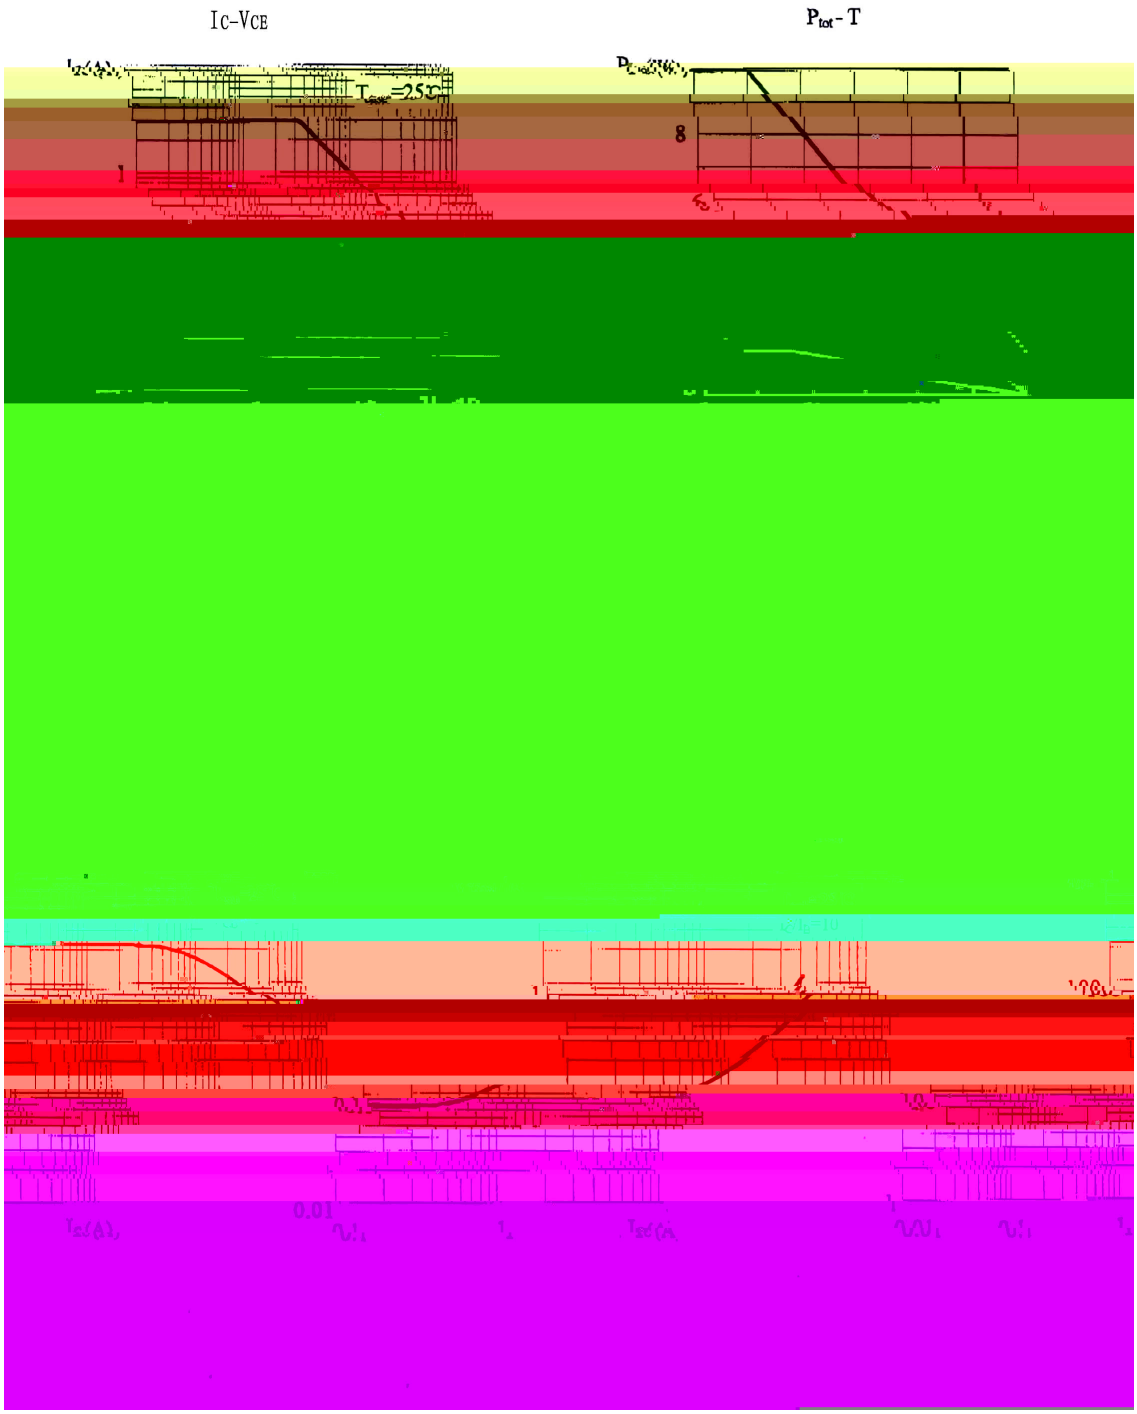

/ Package Dimensions

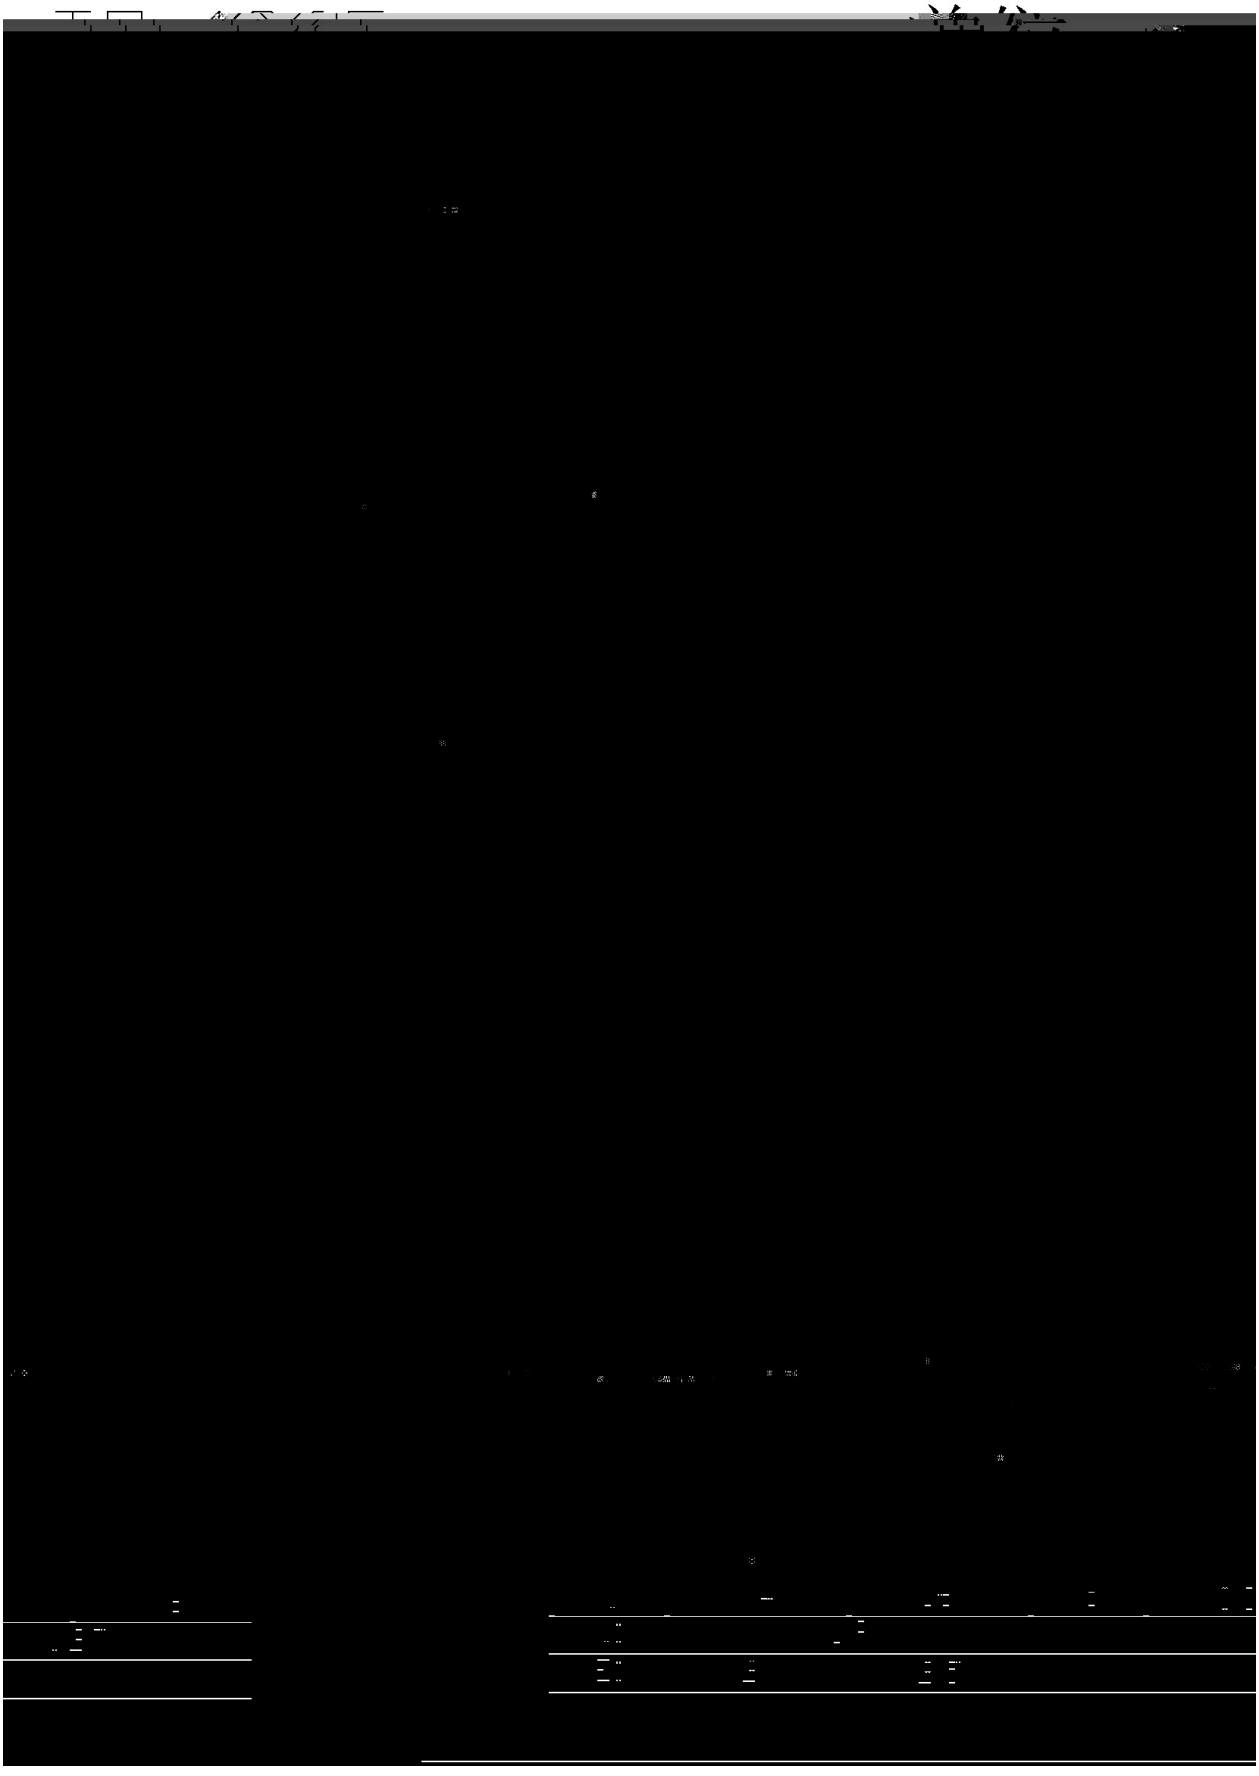

/ Marking Instructions

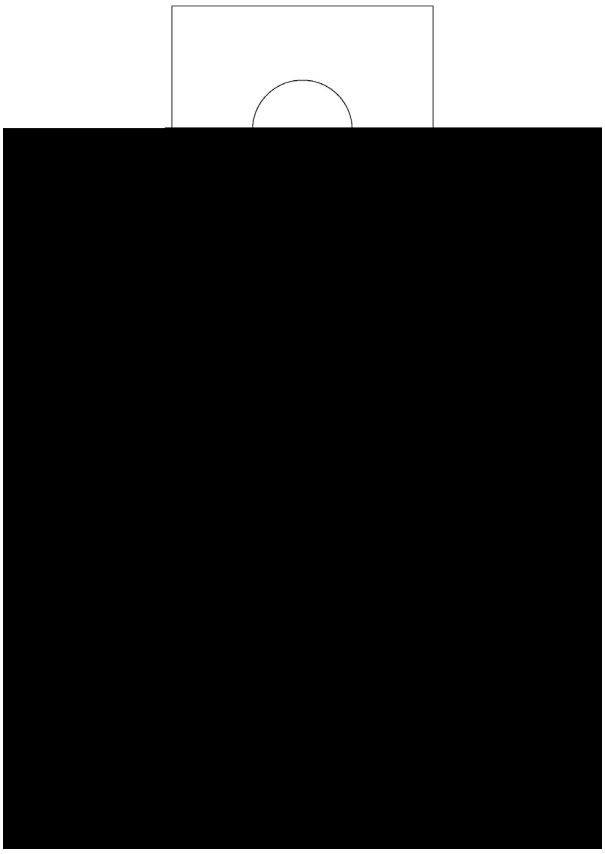

BR

CD910

O h_{FE}

****

Note:

BR:	Company Code
CD910:	Product Type.
O:	h_{FE} Classifications Symbol
****:	Lot No. Code, code change with Lot No.

( ) / Temperature Profile for Dip Soldering(Pb-Free)

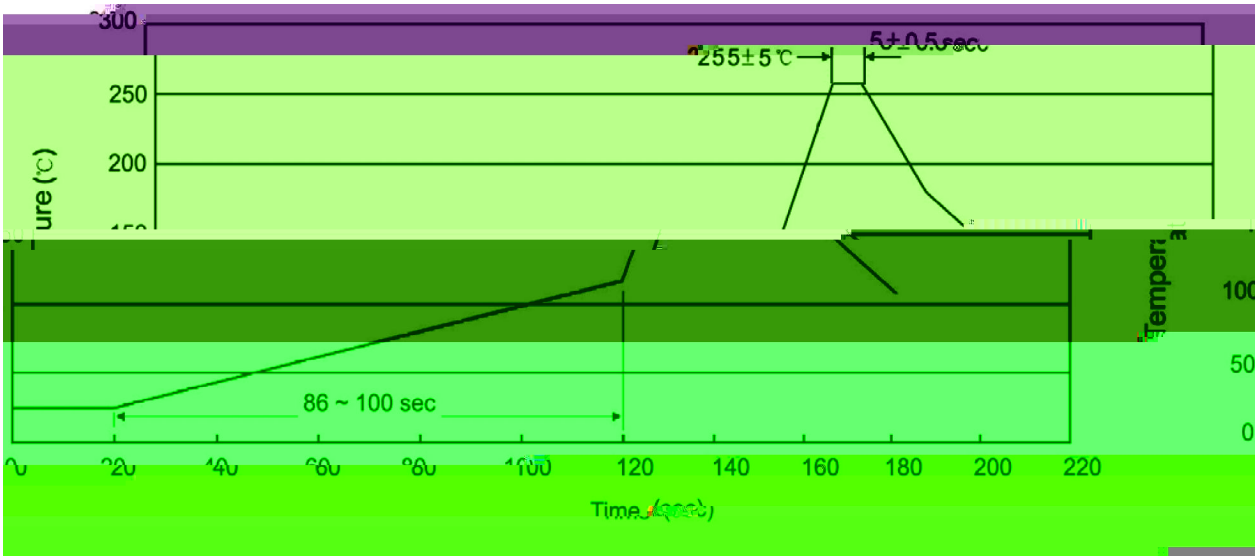

					Note:
1	25	150	60	90sec;	1.Preheating:25~150 , Time:60~90sec.
2	255±5			5±0.5sec;	2.Peak Temp.:255±5 , Duration:5±0.5sec.
3		2	10	/sec.	3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

270±5	10±1 sec.	Temp.:270±5	Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units					Dimension		(unit mm^3)

/ TUBE

Package Type	Units	Dimension	(unit mm^3)