
TO-262 N MOS N-CHANNEL MOSFET in a TO-262 Plastic Package..


, ,

Low gate charge, low crss, fast switching.

DC/DC


These devices are well suited for high efficiency switching DC/DC converters and switch mode power supplies.








PIN1 G PIN 2 D PIN 3 S

See Marking Instructions.

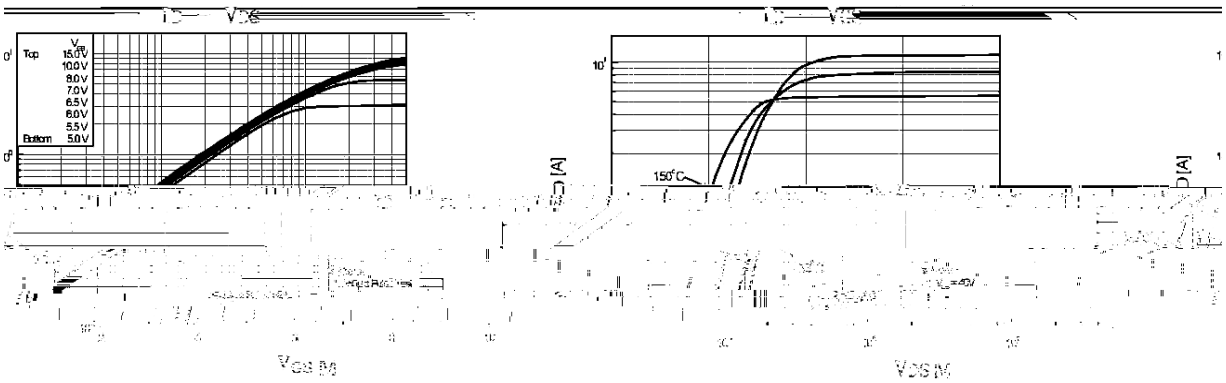


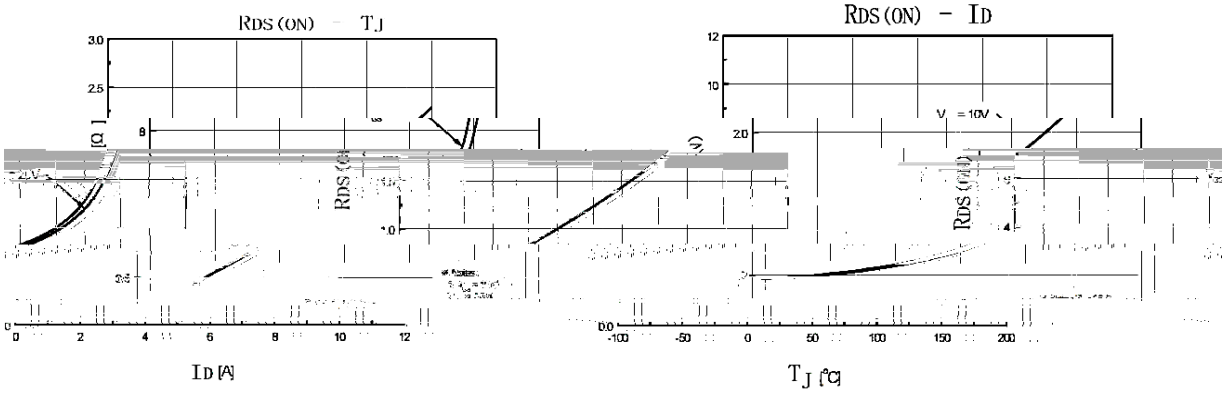
RDS(ON) – TJ
RDS(ON) – ID
ID [A]
TJ [°C]

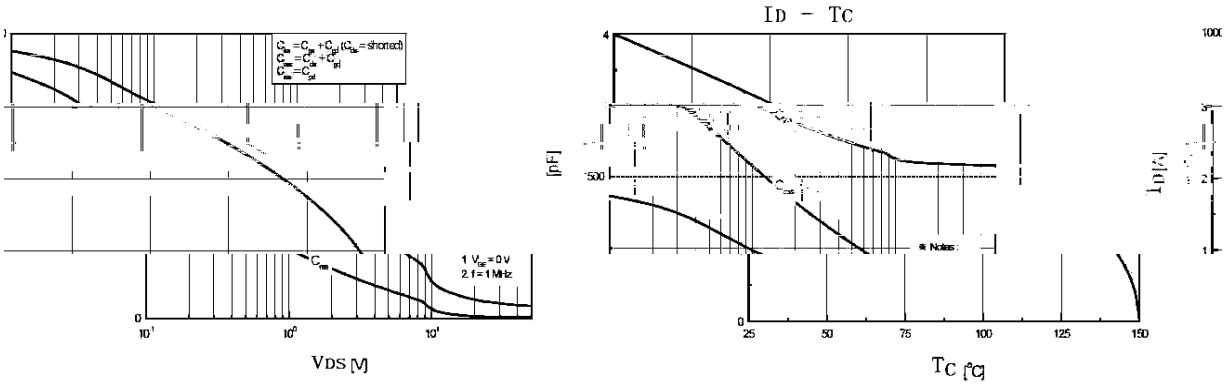
ID – TC
VDS [V]
TC [°C]

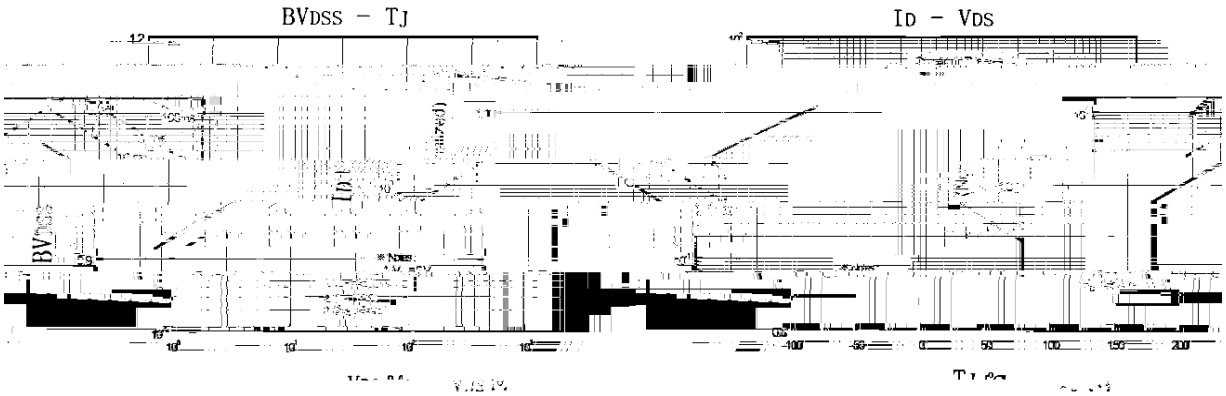
BVDSS – TJ
ID – VDS

Rev.D Dec.-2017

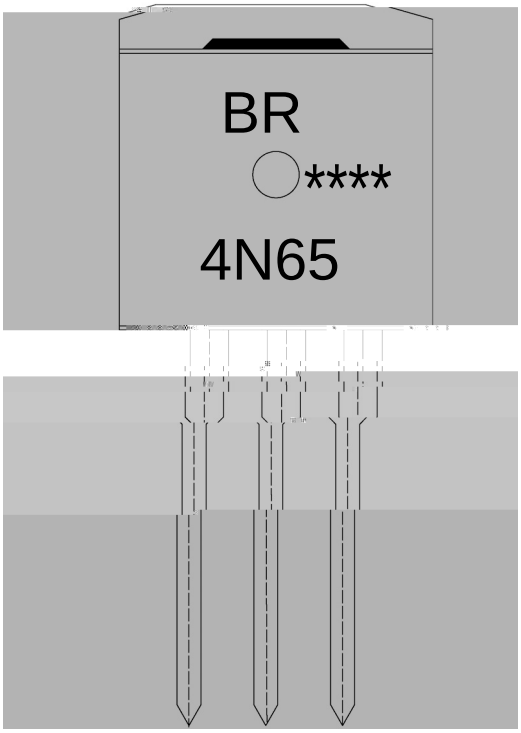

BR

4N65

****

Note:

BR:	Company Code
4N65:	Product Type.
****:	Lot No. Code, code change with Lot No.



			Note:
1	25 150	60 90sec;	1.Preheating:25~150 , Time:60~90sec.
2	255±5	5±0.5sec;	2.Peak Temp.:255±5 , Duration:5±0.5sec.
3		2 10 /sec.	3. Cooling Speed: 2~10 /sec.

270±5 10±1 sec. Temp.:270±5 Time:10±1 sec

/ TUBE

Package Type	Units					Dimension (unit mm³)		
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
TO-262	50	20	1,000	5	5,000	532×31.4×5.5	555×164×50	575×290×180