
TO-262 N MOS N-CHANNEL MOSFET in a TO-262 Plastic Package.


, ,

Low gate charge, low crss, fast switching.

DC/DC

These devices are well suited for high efficiency switching DC/DC converters .






PIN1 G PIN 2 D PIN 3 S

Parameter	Symbol	Rating	Unit

/ Package Dimensions

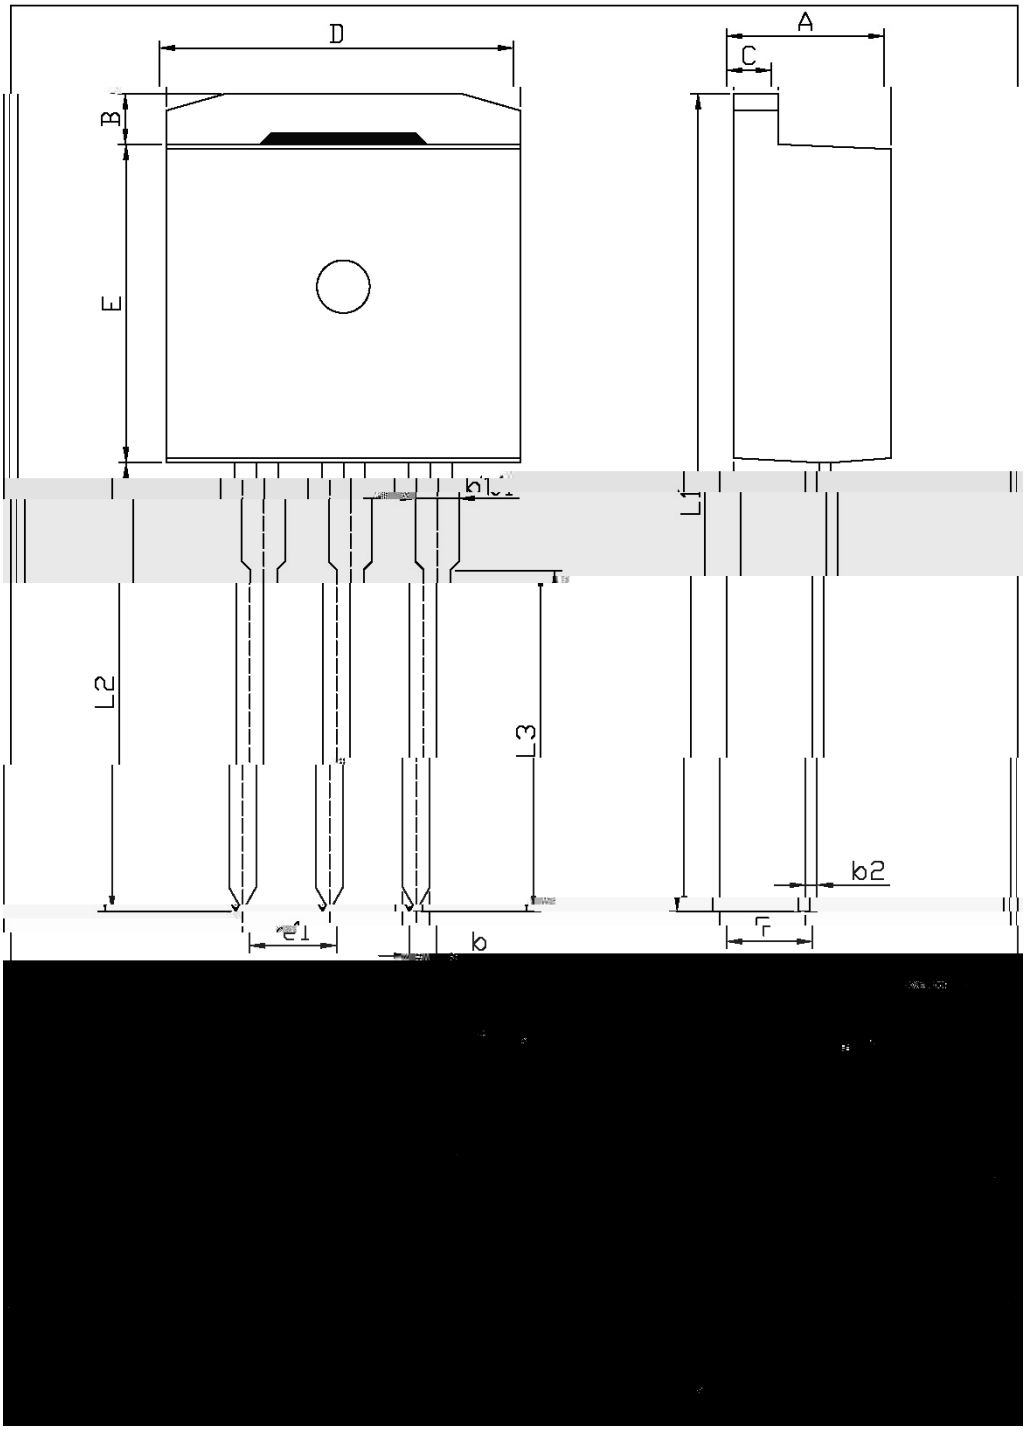

( ) / Temperature Profile for Dip Soldering(Pb-Free)



					Note:
1		25 150		60 90sec;	1.Preheating:25~150 , Time:60~90sec.
2		255±5		5±0.5sec;	2.Peak Temp.:255±5 , Duration:5±0.5sec.
3			2 10 /sec.		3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

270±5	10±1 sec.	Temp.:270±5	Time:10±1 sec

/ Packaging SPEC.

/ TUBE

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm^3)		
	只 套管	套管 盒	只 盒	盒 箱	只 箱	套管	盒	箱

/ Notices