˜Yت / Descriptions

◕ È / Features

, , ,

ข ي / Applications

, ,UPS

Л ڤ ̃ ̣ ̃ ع ≠ / Equivalent Circuit



ã ⅄ ʊ˜ / Pinning

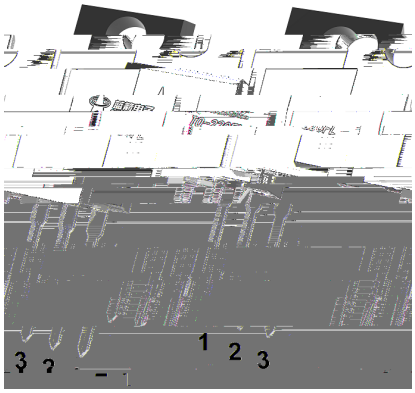

Łˌ ʜ ̄ ̀ / Marking

⁝ ⁄ ⅃ ⅃̃Ạ / Electrical Characteristics(Ta=25 ⅃)

		Ω				
		μ				

⁝ ƎĄ´E ⅵ ƒ / Electrical Characteristic Curve

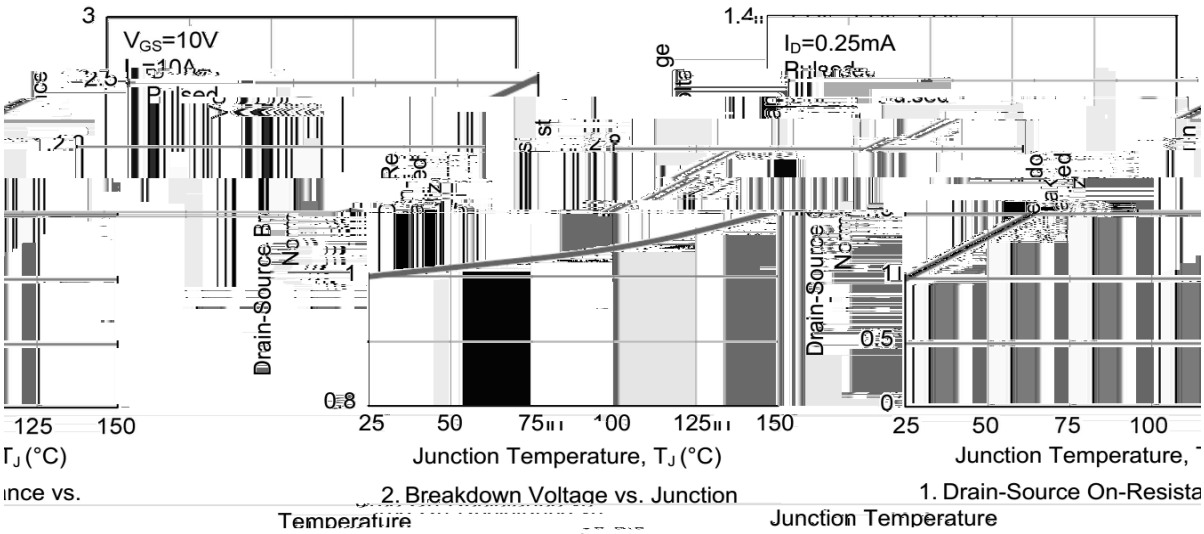

2. Breakdown Voltage vs. Junction Temperature

1. Drain-Source On-Resista Junction Temperature

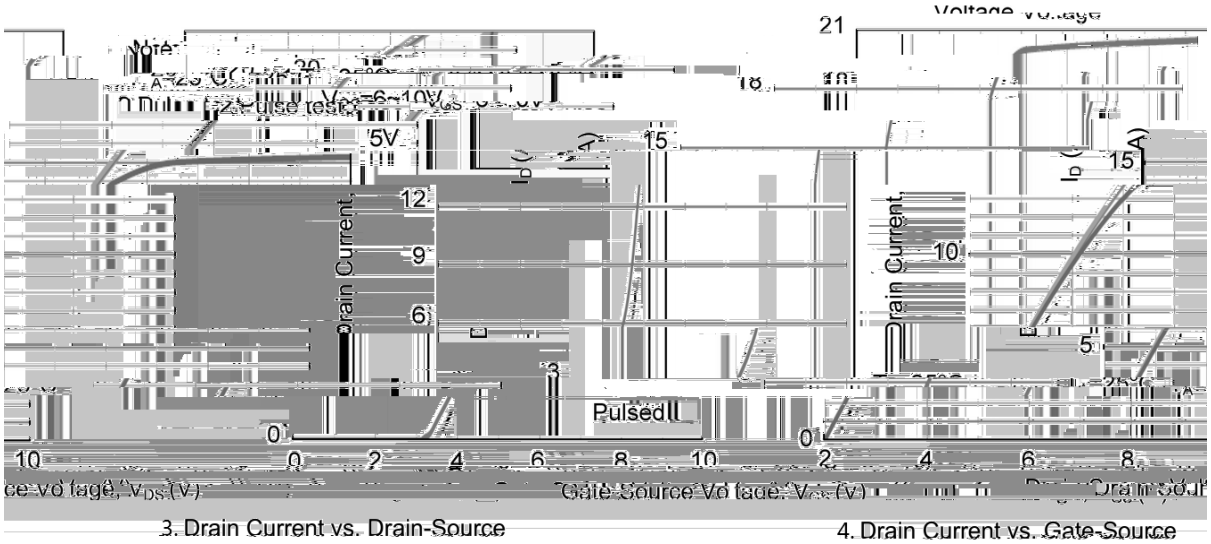

3. Drain Current vs. Drain-Source Voltage

4. Drain Current vs. Gate-Source Voltage

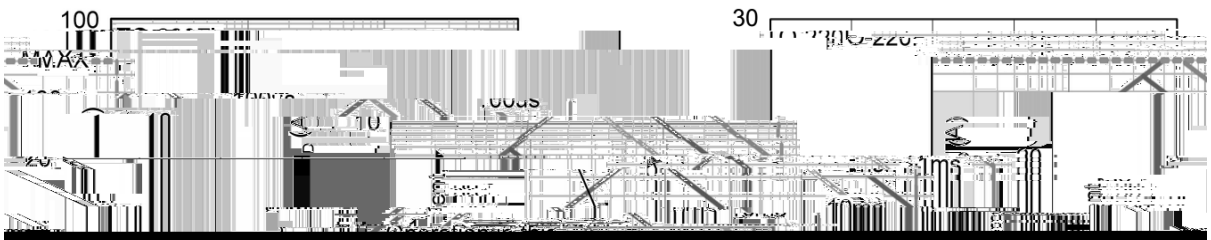

[redacted]

ᵘ ĖÒĻ ʃ / Package Dimensions

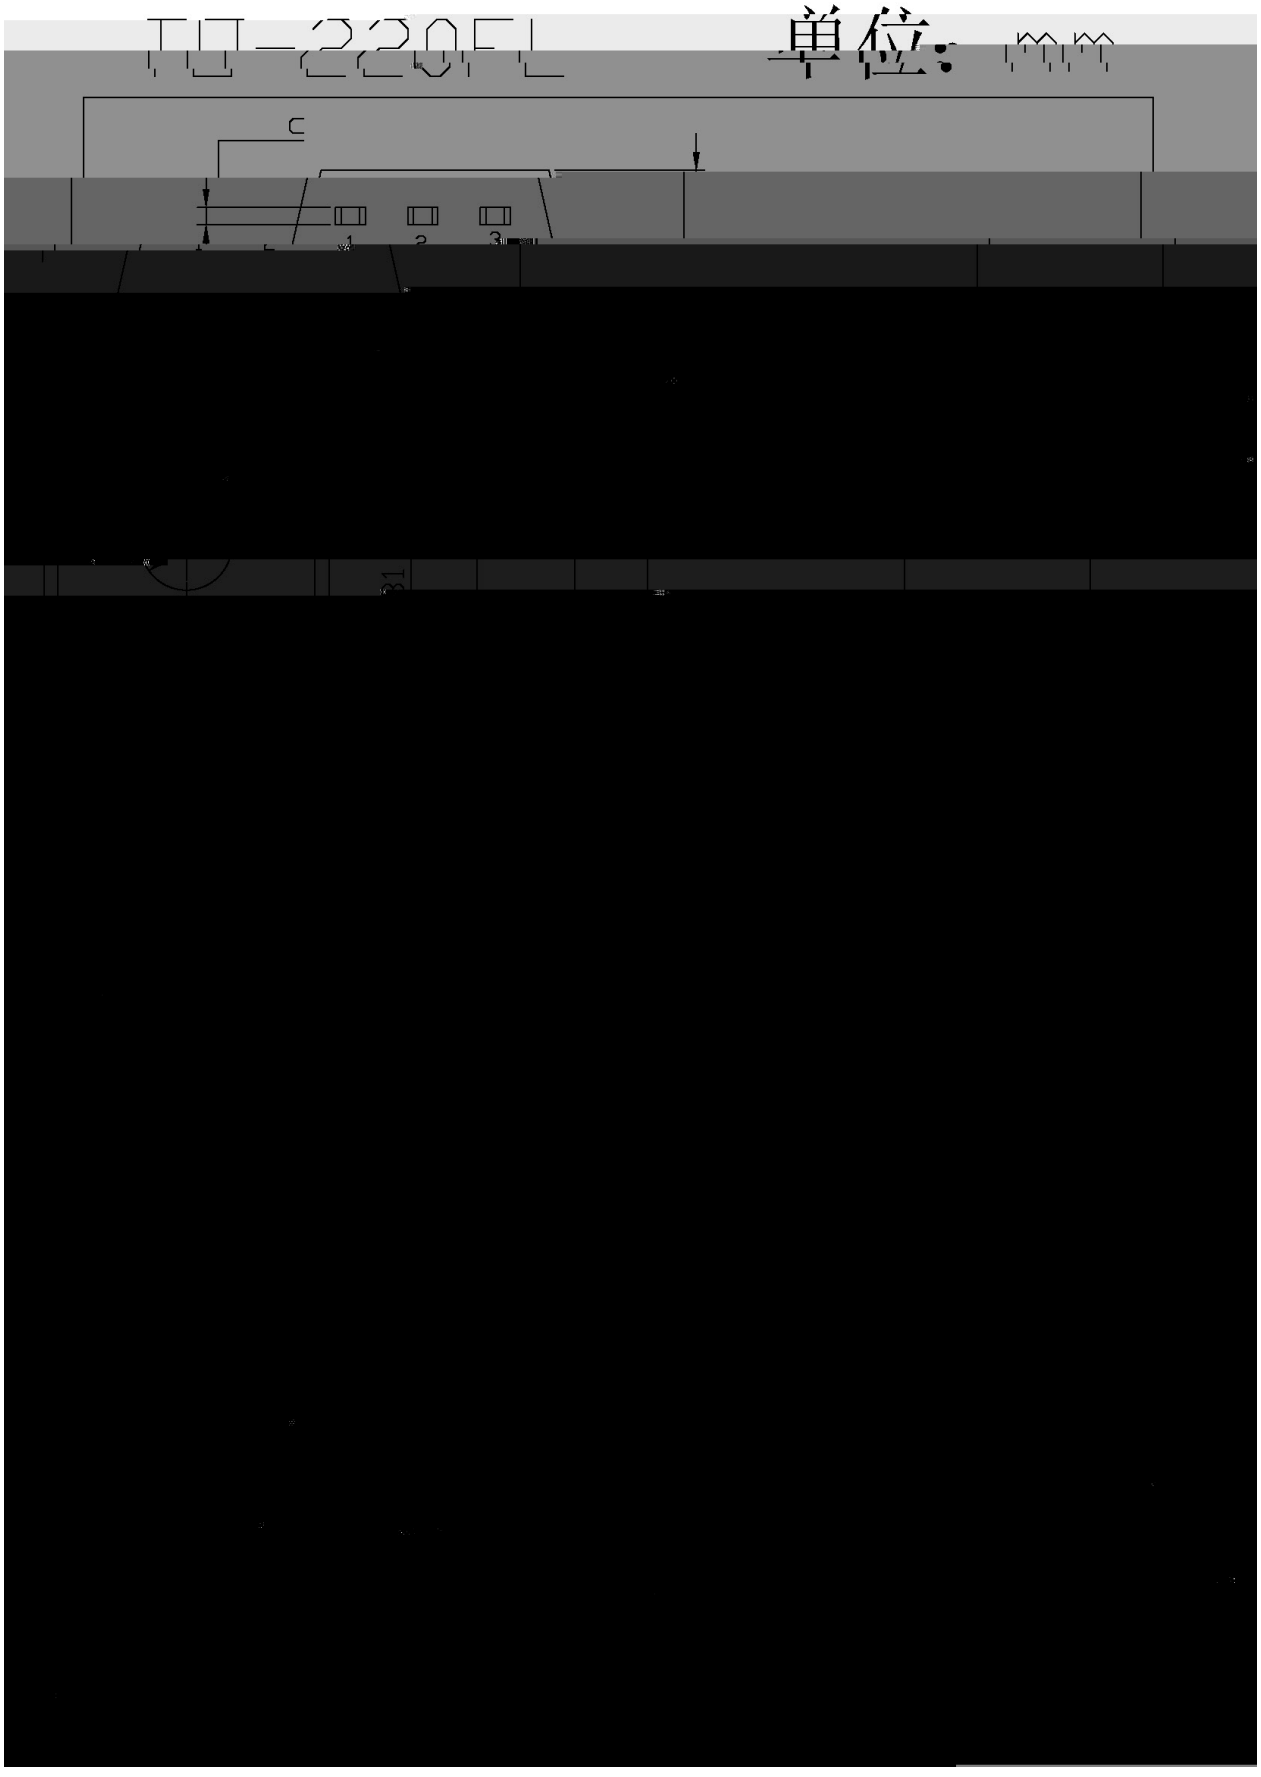

ł. Ļ'Ω / Marking Instructions

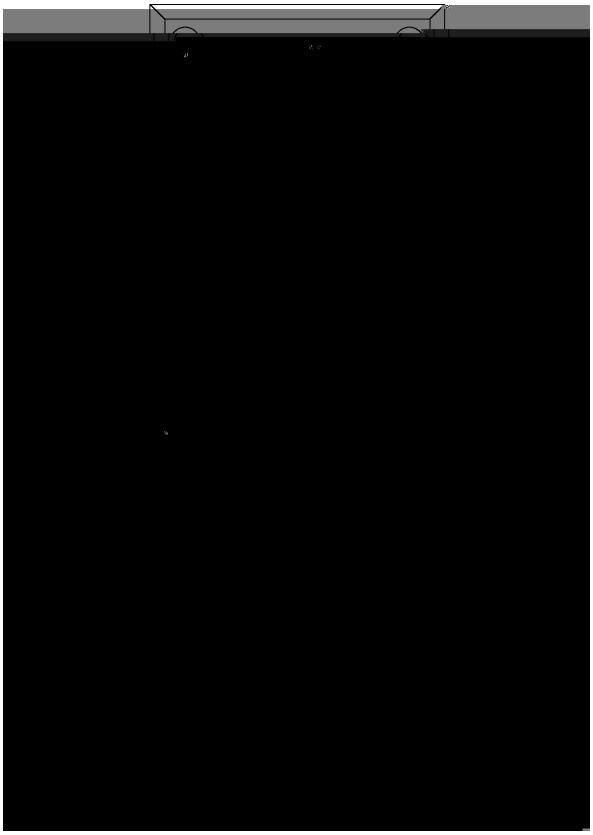

BR

20N70

****

↓ ṣ ╗ ẘ ́E ⅵ ƒ (ᾠ ̌ʊ) / Temperature Profile for Dip Soldering(Pb-Free)

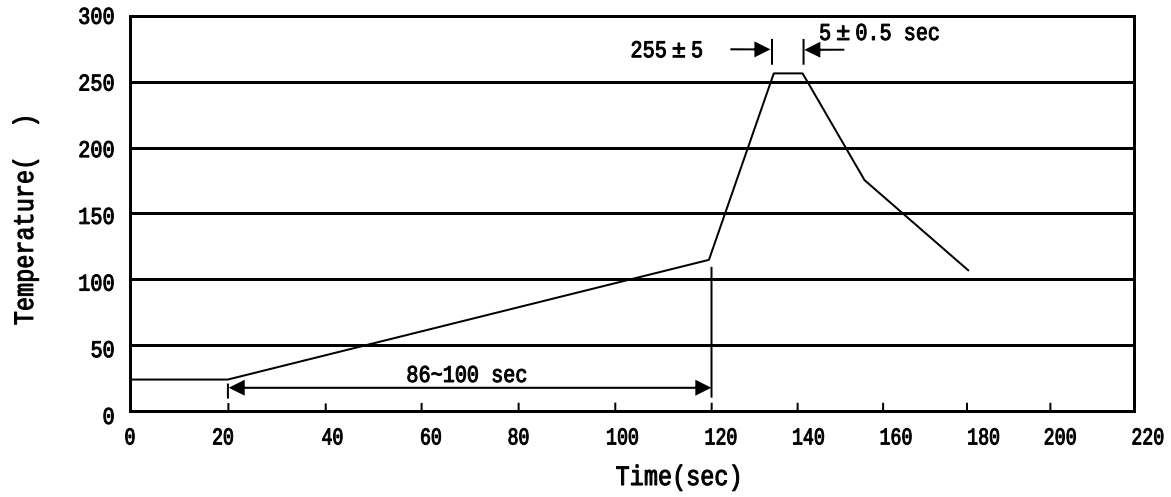

± ± ± ±

⅃ ϋ ɑ ̄ ̀Y Ţ / Resistance to Soldering Heat Test Conditions

± ±

ɒ ⊏ ⊂— / Packaging SPEC.

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

ä ɤ ⌊ ̌Ω / Notices