



TO-251 ḾḾḃ N




/ Electrical Characteristic Curve

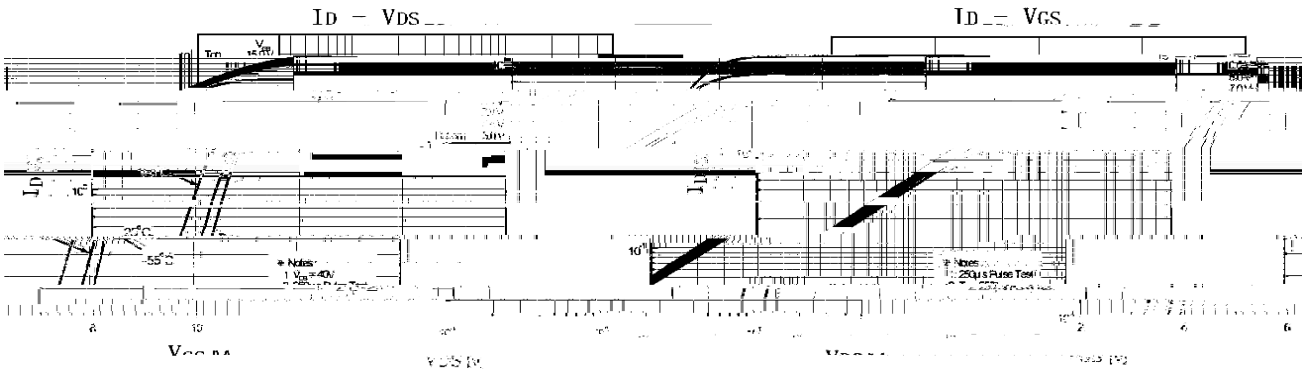


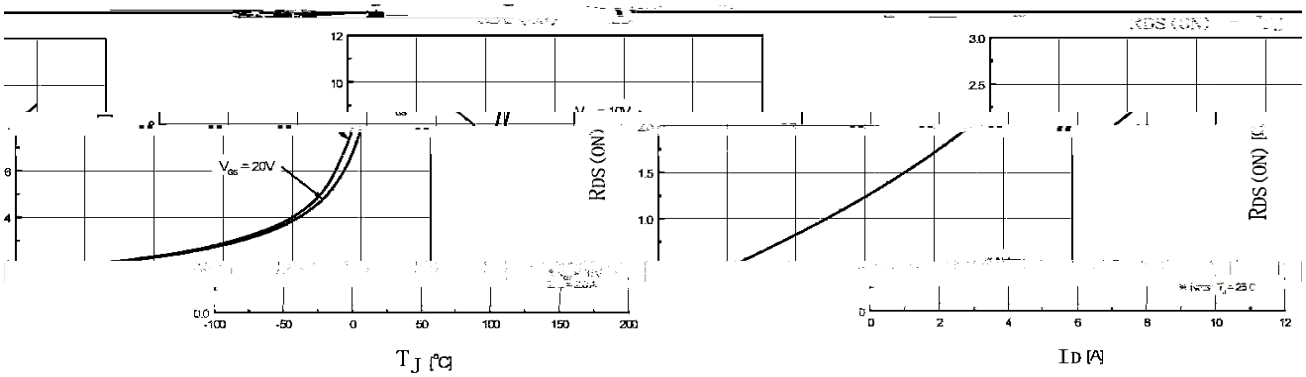

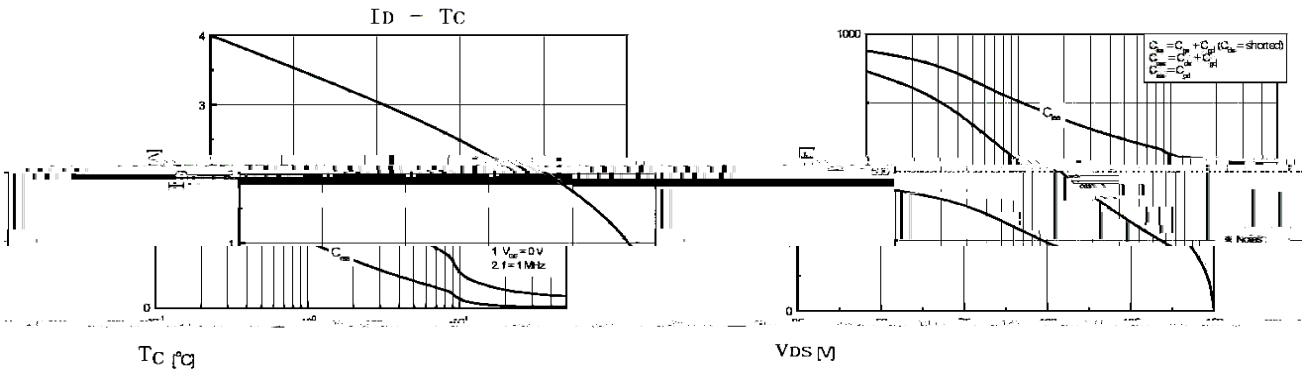

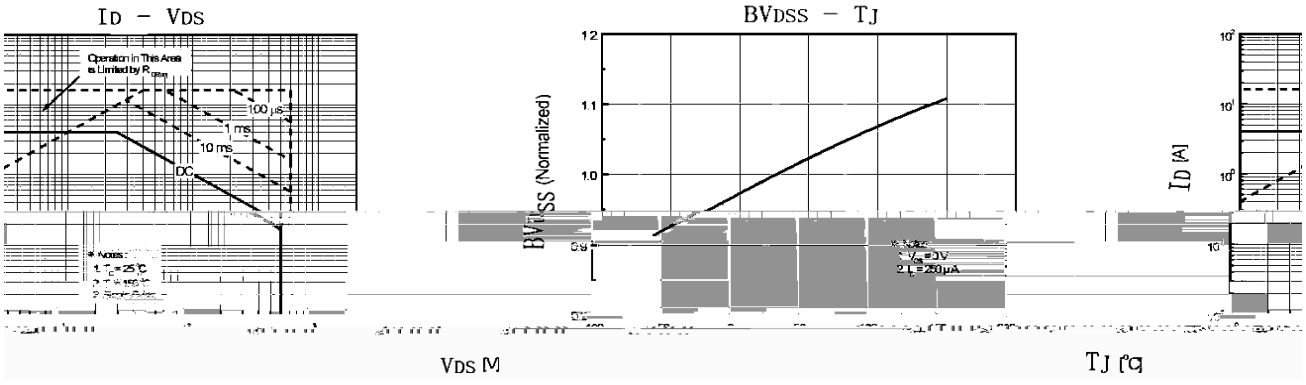


/ Package Dimensions

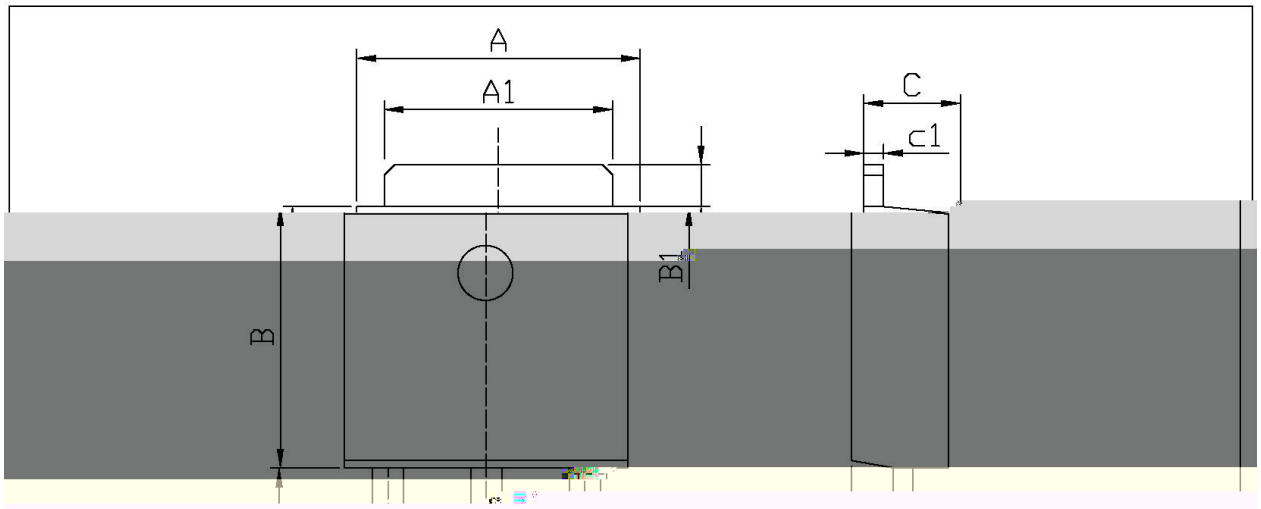

单位：mm

/ Marking Instructions

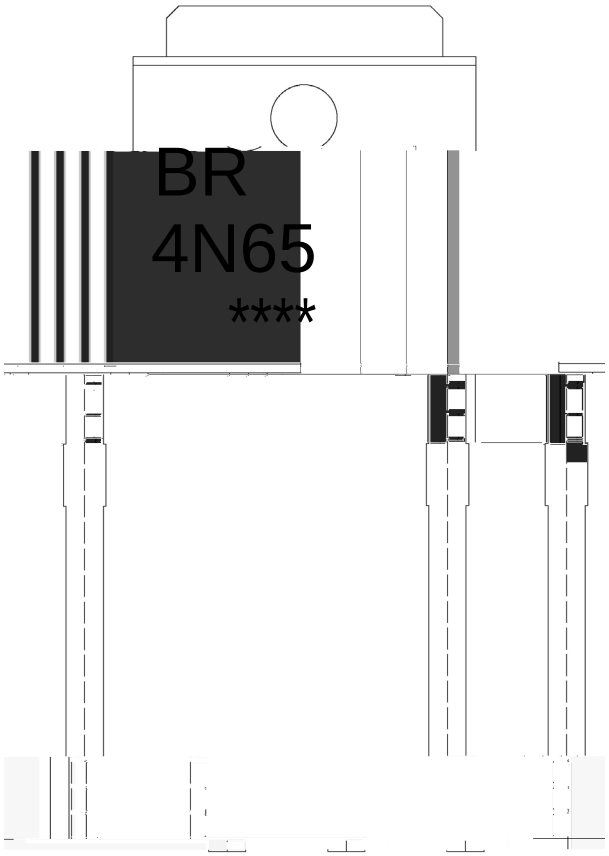


ᴗ ˝ χ	
BR χ	ꟾꟿ ϛ ᴎ ᒣ
7Q98 χ	ꟾꟿ ʒ ᴺ ᒣ
---- χ	ꟾꟿ ꞁ ꞩ ᾗ ᴺ ᒣ ꞁ ₹ ꞁ ꞩ ᾗ ᴺ Ψ ᖘ

Note:

BR:	Company Code
4N65:	Product Type.
****:	Lot No. Code, code change with Lot No.

( ) / Temperature Profile for Dip Soldering(Pb-Free)

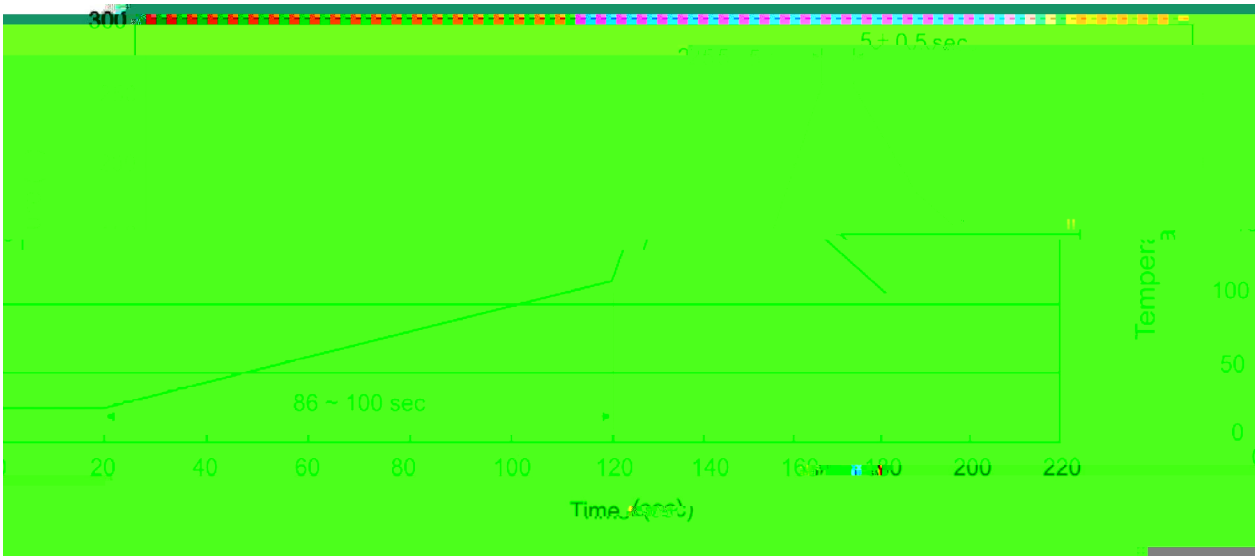

ب ˝ χ

1 Ĺ ♬ □ ỷ 25 Ḱ 150 ł ı `H ڑ 60 Ḱ 90sec;

2 Š Ө □ ỷ 255 ° 5 ł ı `H ڑ `Y ﾊ ㎞ 5 ° 0.5sec;

3 ì ˙ ｲ ˛ ɔ ﻉ ỷ ㎞ 2 Ḱ 10 ł /sec.

Note:

1.Preheating:25~150 ł , Time:60~90sec.

2.Peak Temp.:255 ° 5 ł , Duration:5 ° 0.5sec.

3. Cooling Speed: 2~10 ł /sec.

/ Resistance to Soldering Heat Test Conditions

□ ỷ χ 270 ° 5 ł `H ڑ χ 10 ° 1 sec. Temp.:270±5 Time:10±1 sec

/ Packaging SPEC.

¨Ω ţ ｲ Ł / BULK

Package Type	Units					Dimension		(unit mm³)
	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-251	1,000	10	10,000	5	50,000	135×190	237×172×102	560×245×195

˛ ｱ ｲ Ł / TUBE

Package Type	Units	Dimension	(unit