| | | | | | |
|---|---|---|---|---|---|
| B | 2348-7 | | | | |
| C | 2349-43-25 | | | | |

TO-263
Schottky Barrier Diode in a TO-263 Plastic Package.

Low forward voltage drop, low power losses,High efficiency operation. HF Product.

¥ ¦ § ¨ © ª « ¬ - ® ¯ ° ± ² ³ ´ OR-µ¶ ·
DC-DC ¸ ¯ ¹ º ª «
For use in solar cell junction box as a bypass diode for protection,For use in high frequency inverters, switching power supplies, freewheeling diodes,OR-ing diode, dc-to-dc converters and reverse battery protection.



PIN1 » Anode PIN 2¼4 » Cathode PIN 3 » Anode

## / $h_{FE}$ Classifications & Marking

½ ¾ ¿ See Marv

| Parameter | Symbol | Rating | Unit |
|---|---|---|---|
| Maximum repetitive peak reverse voltage | $V_{RRM}$ | 50 | V |

## / Package Dimensions

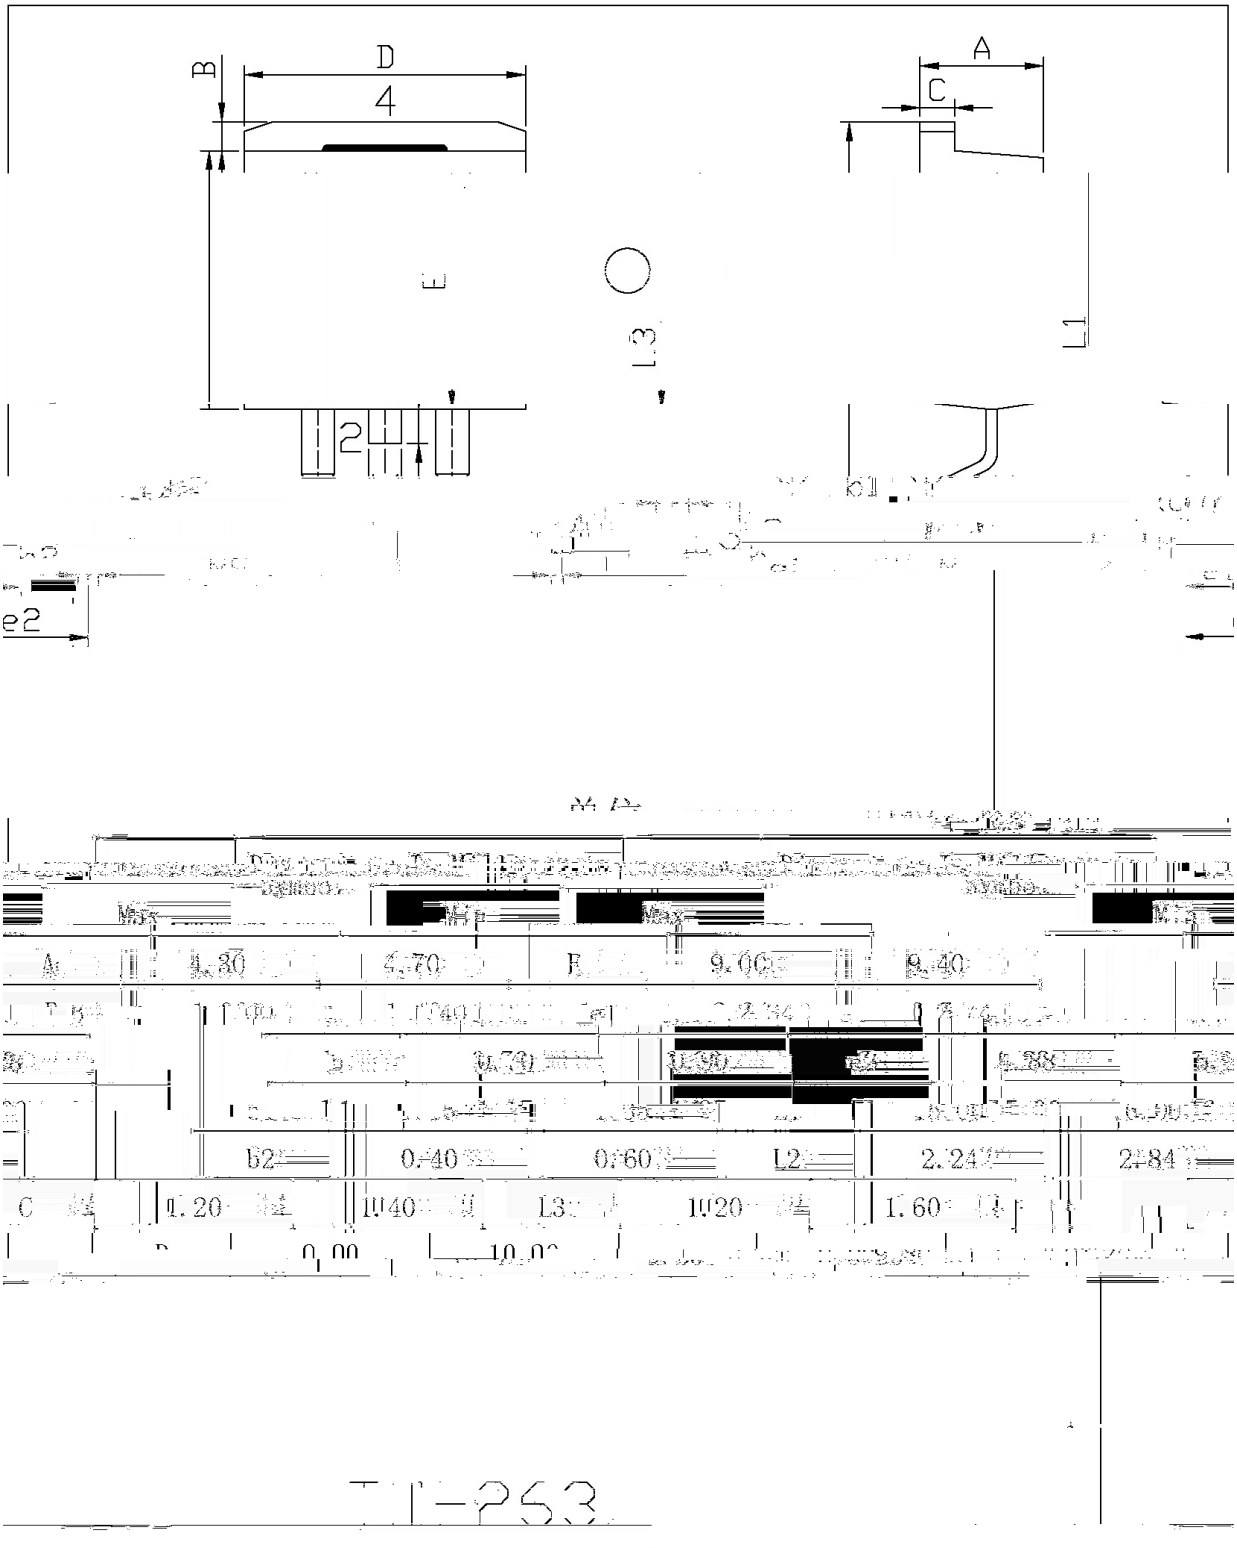

**(**