BRMBR10200AC

DATA SHEET

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)

/ Electrical Characteristic Curve

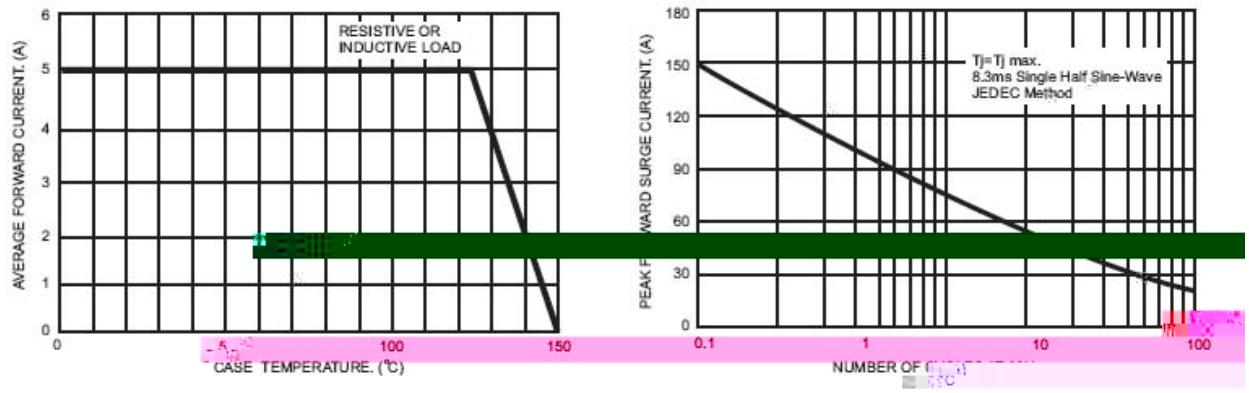

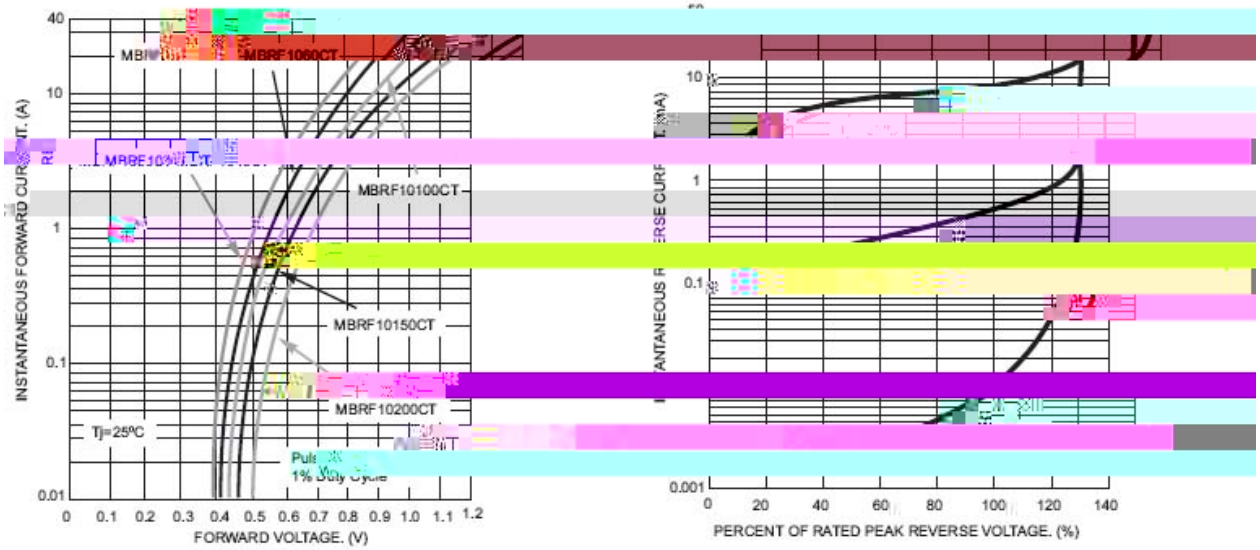

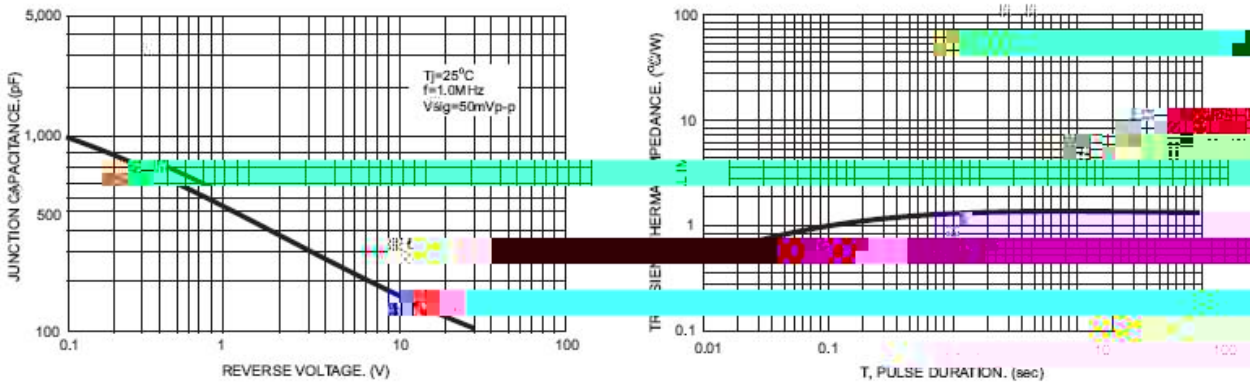

/ Package Dimensions

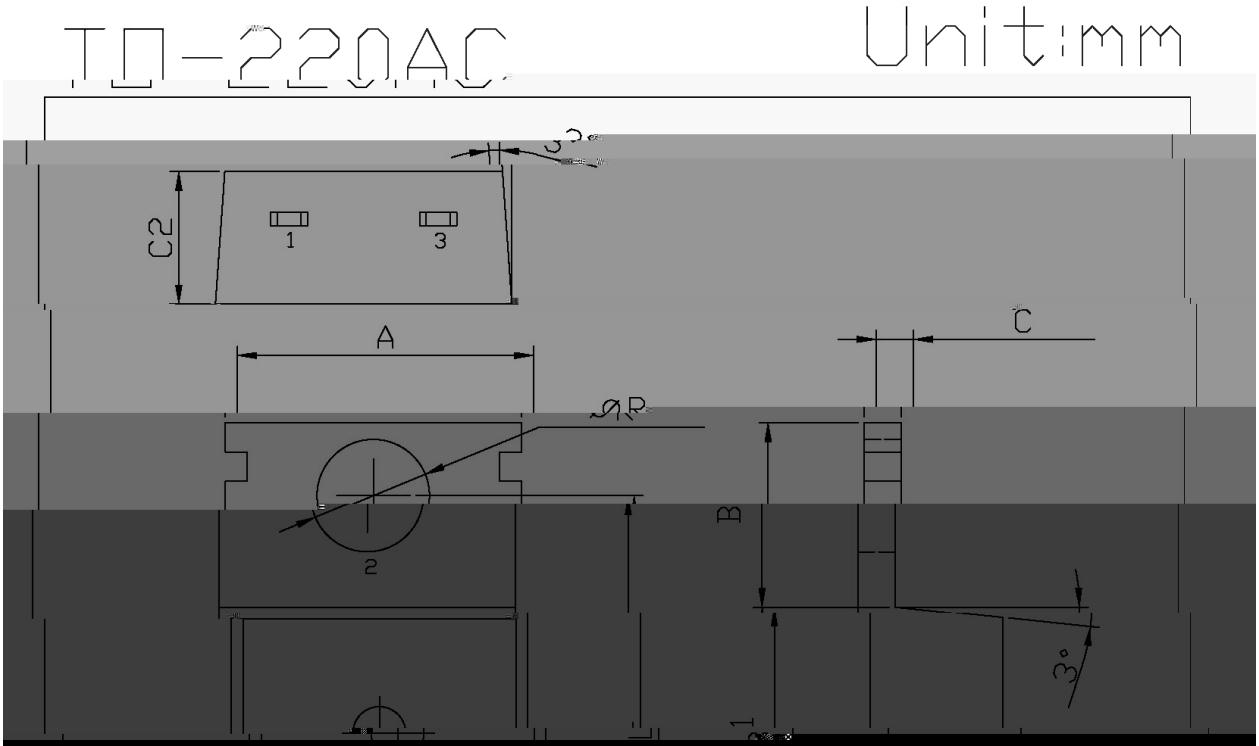

[redacted]

L	15.7	16.1	C1	2.2	2.6
b	12.6	13.6	C	1.2	1.4
b1	9.6	10.6	C	0.4	0.6
[illegible]	[illegible]	[illegible]	C2	[illegible]	[illegible]
0.1	0.7	0.9			

/ Marking Instructions

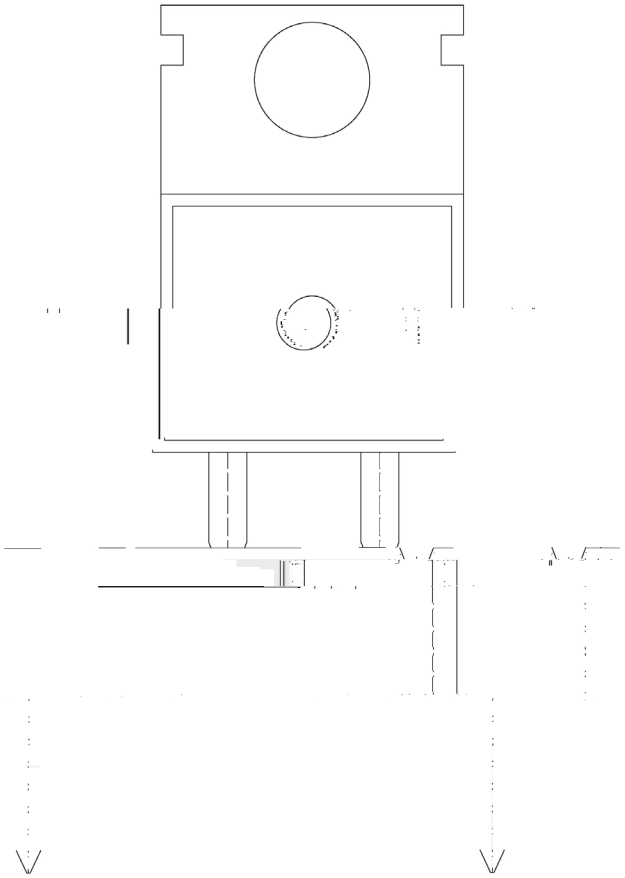

BR

MBR10200

****

( ) / Temperature Profile for Dip Soldering(Pb-Free)

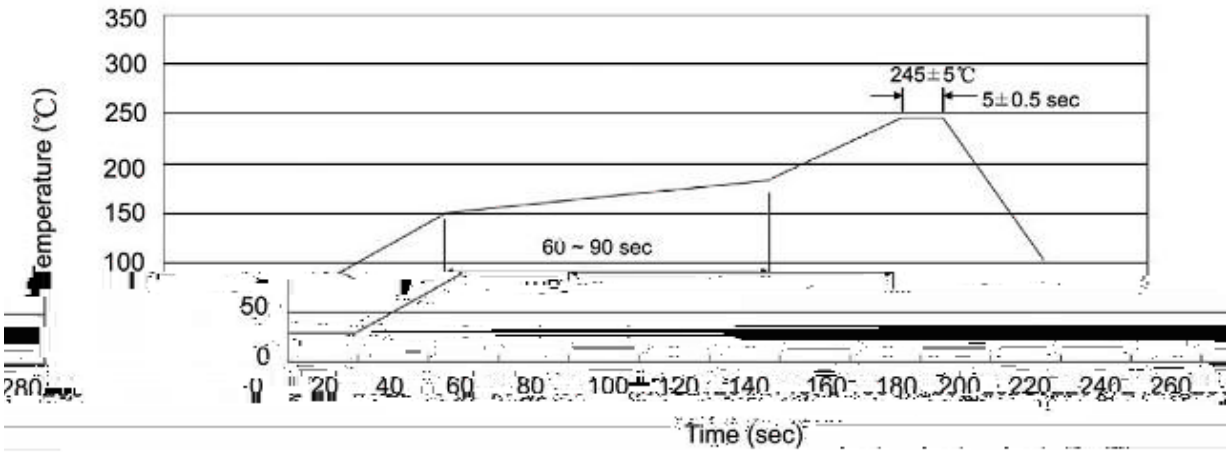

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-220/F/AC	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box
TO-220/F/AC	50	20	1,000	5	5,000	532×31.4×5.5	555×164×50	575×290×180

/ Notices