SOT23-6 TVS

Low Capacitance TVS Array in a SOT23-6 Plastic Package.

I/O

Small package saves board space Protects up to four I/O lines & power line Low capacitance for high-speed interfaces Low leakage current and clamping voltage Low operating voltage.


ώ ۥ Ξ ̈Ạ / Absolute Maximum Ratings(Ta=25 ﻝ)


Parameter	Symbol	Rating	Unit
Peak Pulse Power (tp = 8/20 s)	PPP	150	W
Peak Pulse Current (tp = 8/20 s)	IPP	6	A
ESD per IEC 61000-4-2 (Air)	VESD 1 IEC 61000-4-2 (Air)	±15	kV
ESD per IEC 61000-4-2 (Contact)	VESD 2 IEC 61000-4-2 (Contact)	±8	kV
Operating Temperature	TOPR	-55 to 125	
Storage Temperature	TSTG	-55 to 150	

≠ ﾊ Ξ ̈Ạ / Electrical Characteristics(Ta=25 ﻝ)


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reverse Stand-Off Voltage	V_{RWM}	Pin 5 to GND			5	V
Reverse Breakdown Voltage	V_{BR}	Pin 5 to GND It=1mA	6			V
Reverse Leakage Current	I_R	V_{RWM}=5V T=25 Pin 5 to GND			2	A
Clamping Voltage	V_C	I_{PP}=1A tp=8/20 s Any I/O pin to GND		8.5	12	V
Junction Capacitance	C_{J1}	V_R=0V f=1MHz Any I/O pin to GND			3	pF
Junction Capacitance	C_{J2}	V_R=0V f=1MHz Between I/O pins			1.5	pF

≠ ∃ Ã´E ℵ ƒ / Electrical Characteristic Curve

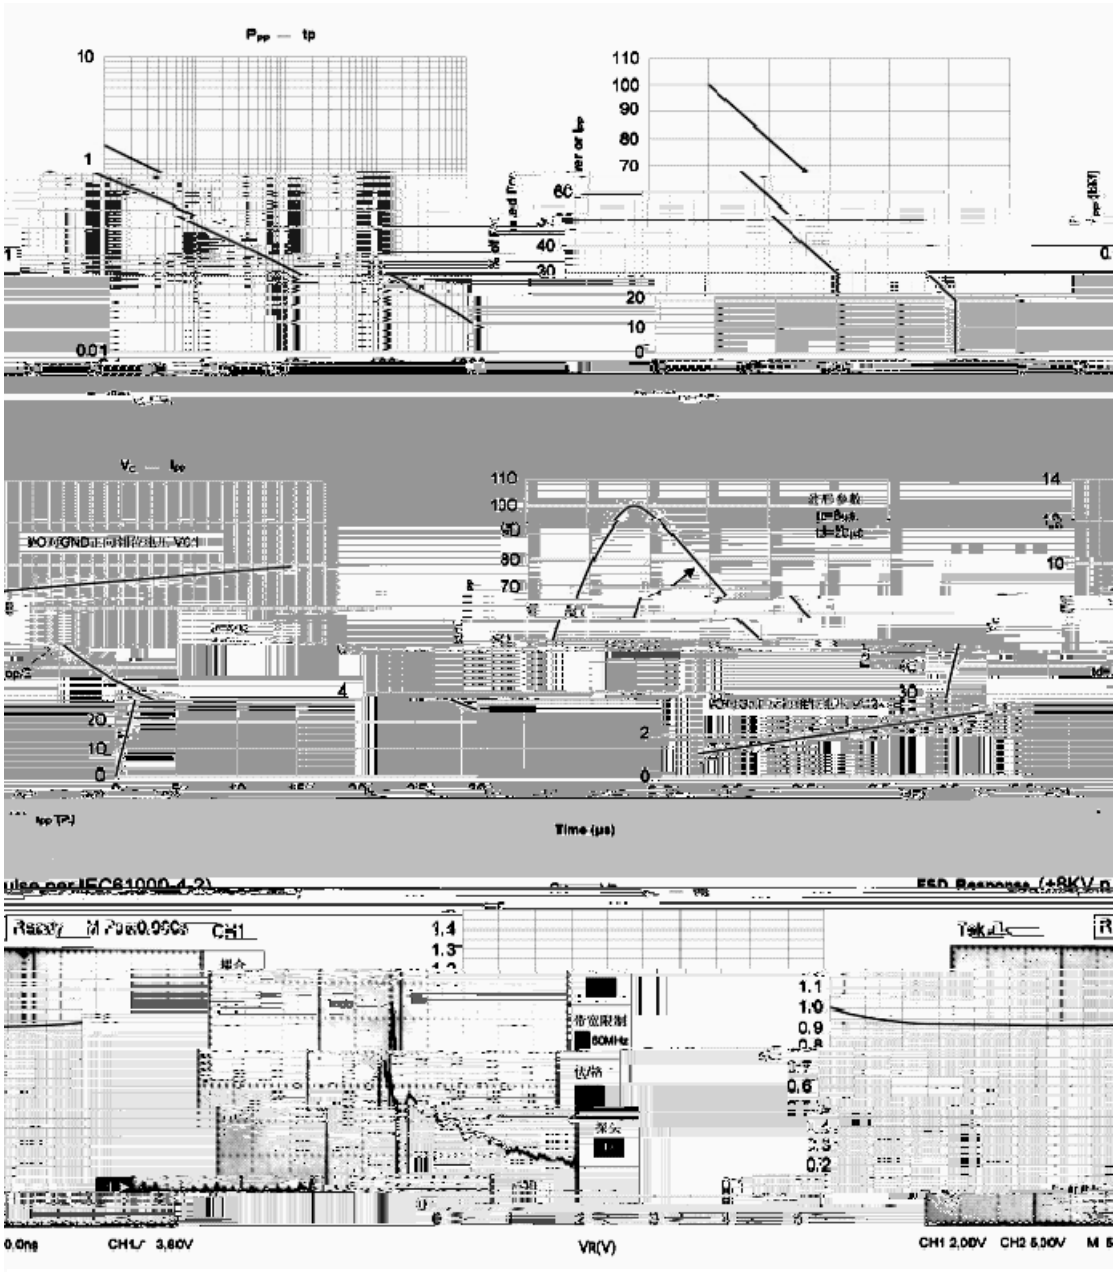


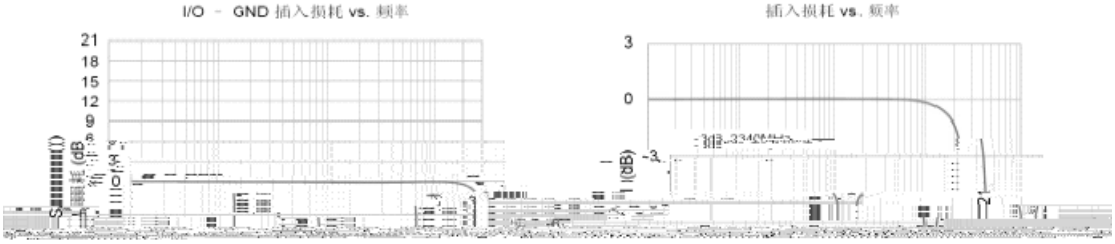

ᵘ ĖÒĻ ʃ / Package Dimensions

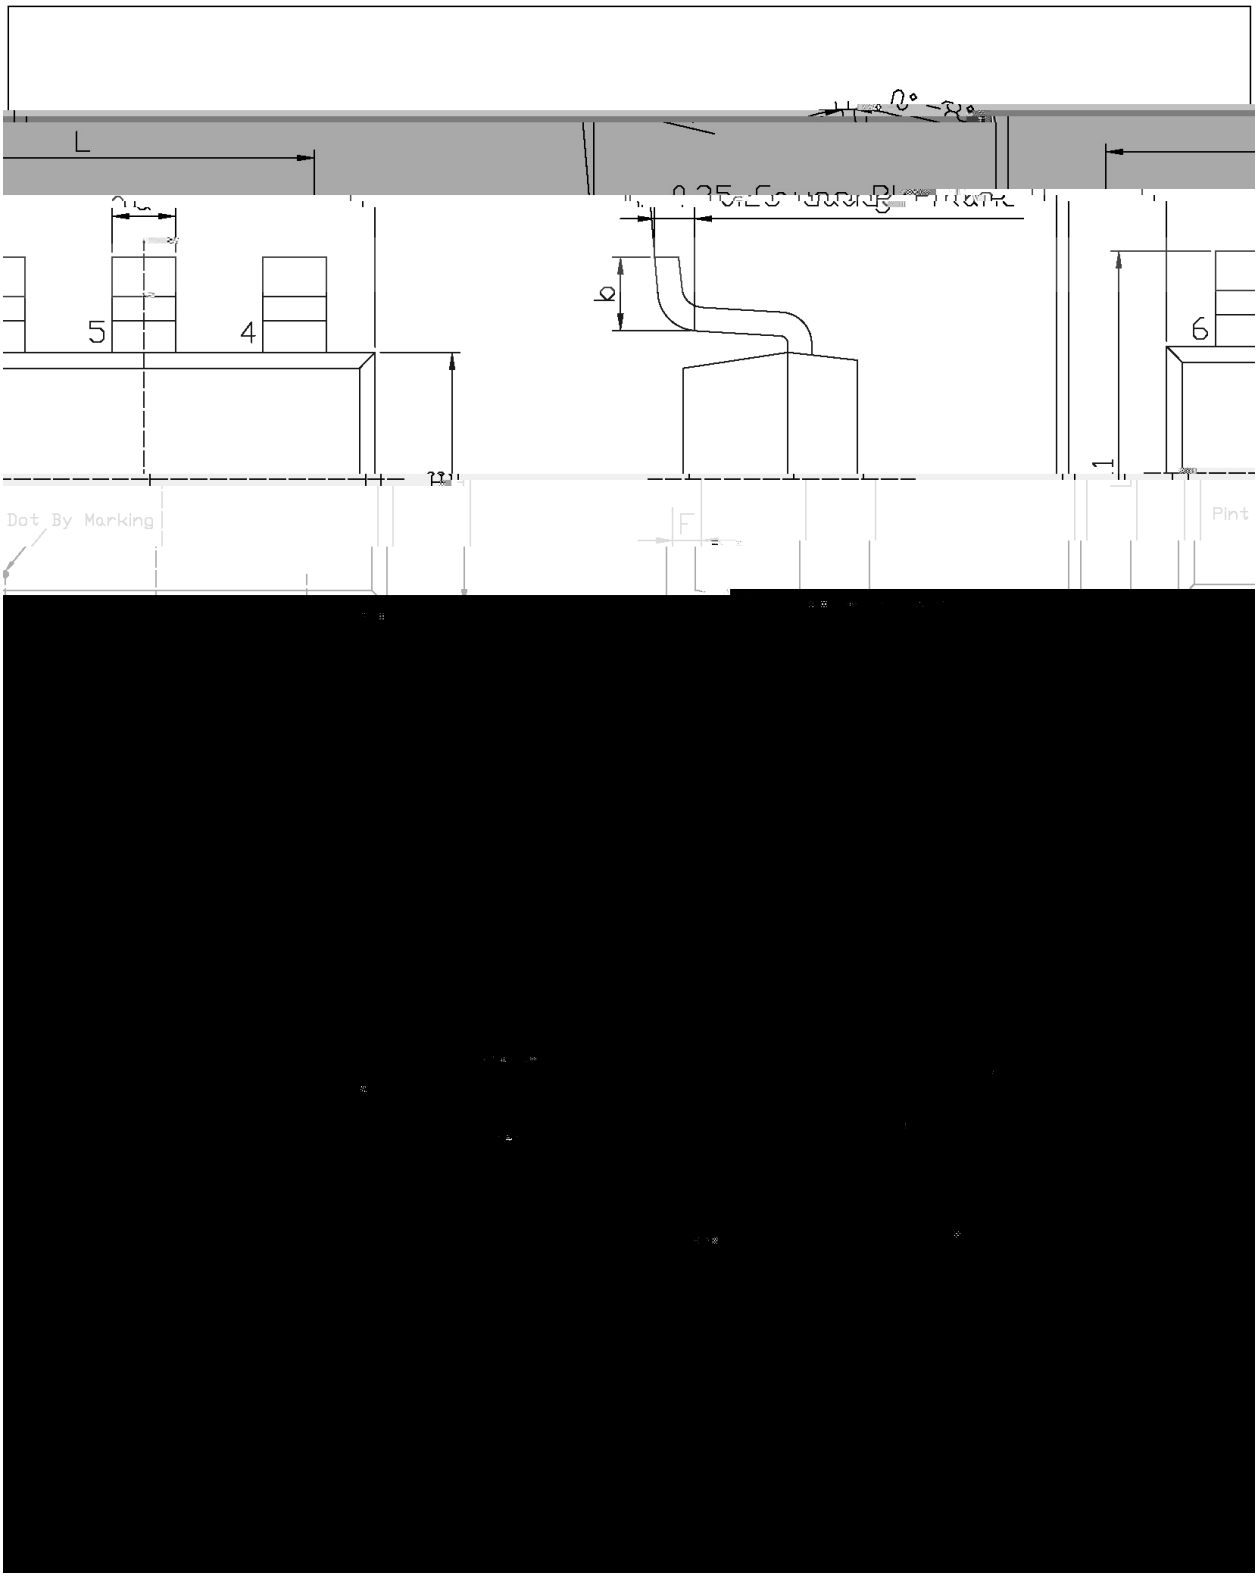

Ł. Ł'Ω / Marking Instructions

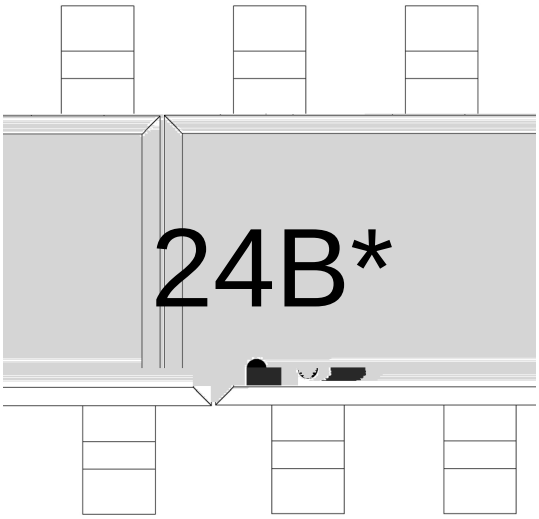

24B


*

Note:

24B: Product Type Code

*: Lot No. Code, code change with Lot No.

ѭ ʃ ╕ ẘ´E ⅵ ʄ (ᾠ ᴈ) / Wh p shudwxuh Suriloh iru LU Uhio r z Vroghulq j+Se0luhh,

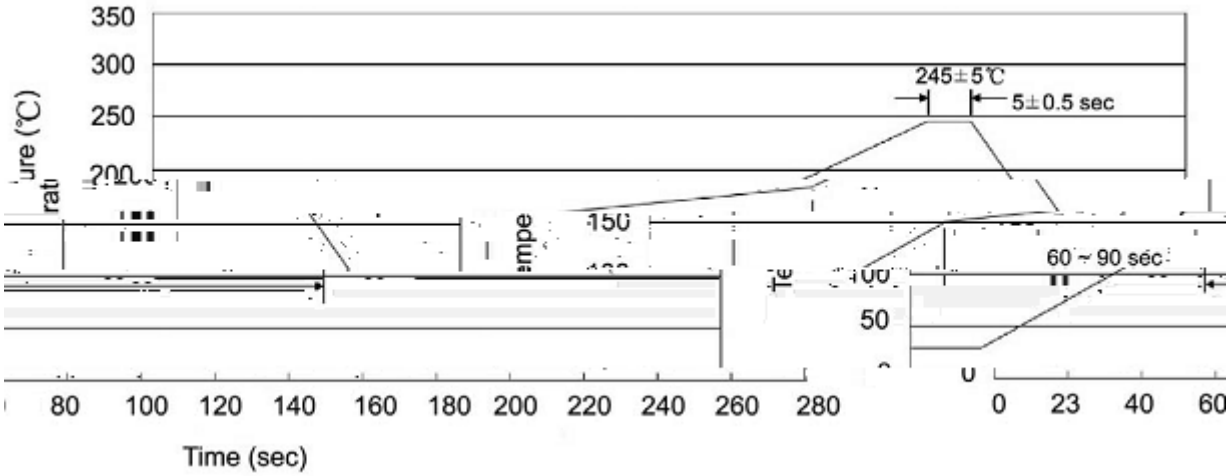

Note:

1	25	150	60	90sec;	1.Preheating:25~150 , Time:60~90sec.
2	245±5			5±0.5sec;	2.Peak Temp.:245±5 , Duration:5±0.5sec.
3		2	10	/sec.	3. Cooling Speed: 2~10 /sec.

ⅎ ü ɋ ⁼ ˋY Ţ / Resistance to Soldering Heat Test Conditions

260±5	10±1 sec.	Temp.:260±5	Time:10±1 sec

ɒ Ŀ ≀ — / Packaging SPEC.

/ REEL

Package Type	Units					Dimension		(unit mm^3)

ä ⅴ ŗ Ѽ / Notices