"Y ت / Descriptions

SOT-323 PNP Silicon PNP transistor in a SOT-323 Plastic Package.

◕ È / Features

, , , MMBTA42W

High voltage, low saturation voltage, low collector output capacitance , complementary pair with MMBTA42W.

४ ڍ / Applications

High voltage control circuit.

Л ڤ ڳ ¿ ع / Equivalent Circuit



ã ⅄ ʊ ˜ / Pinning



PIN1 Emitter PIN 2 Base PIN 3 Collector

Łˌ ʜ ɹ̇ / Marking

Marking	H2D

ƒ Ã Ã E ¼ ƒ / Electrical Characteristic Curve

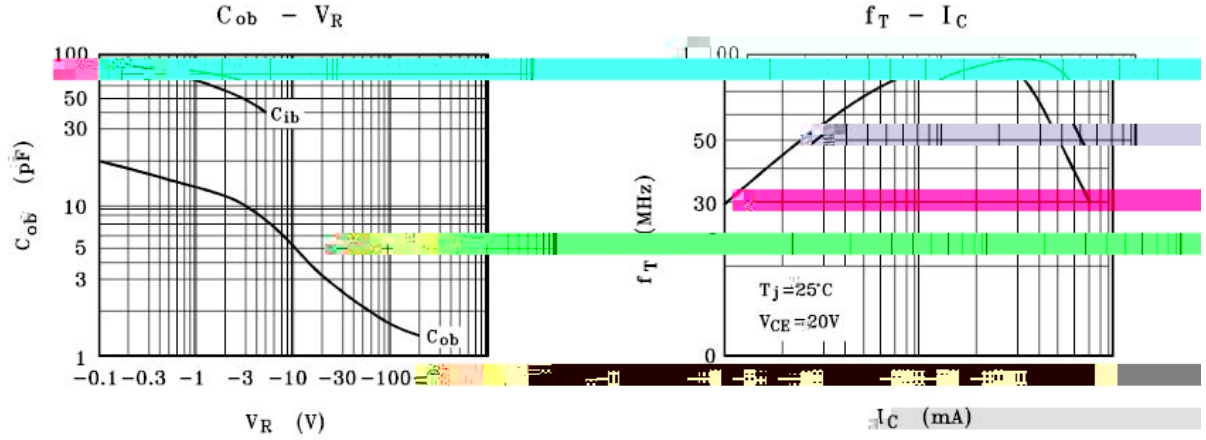

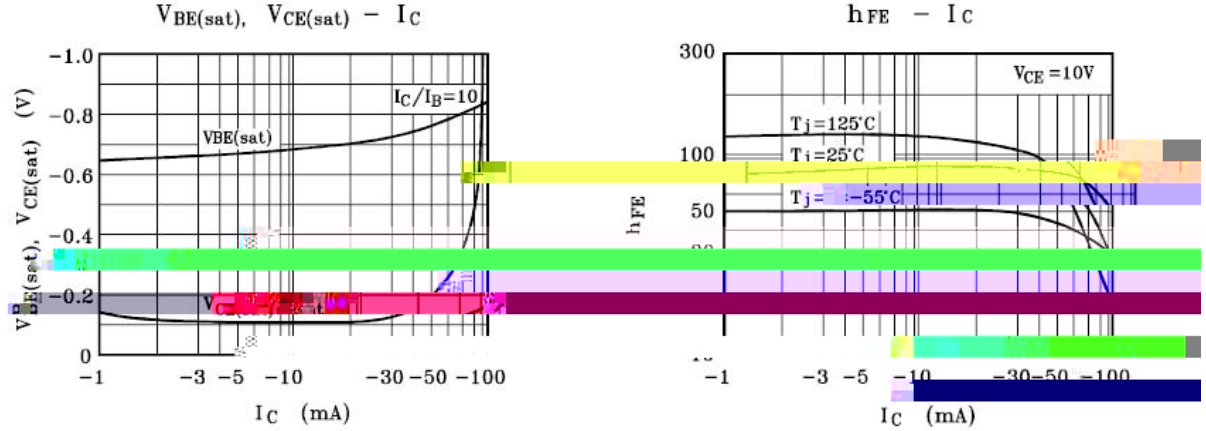

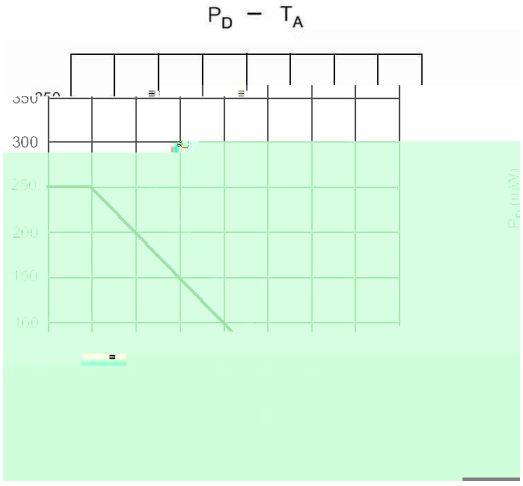

ᵘ Ė Ồ Ļ ƒ / Package Dimensions

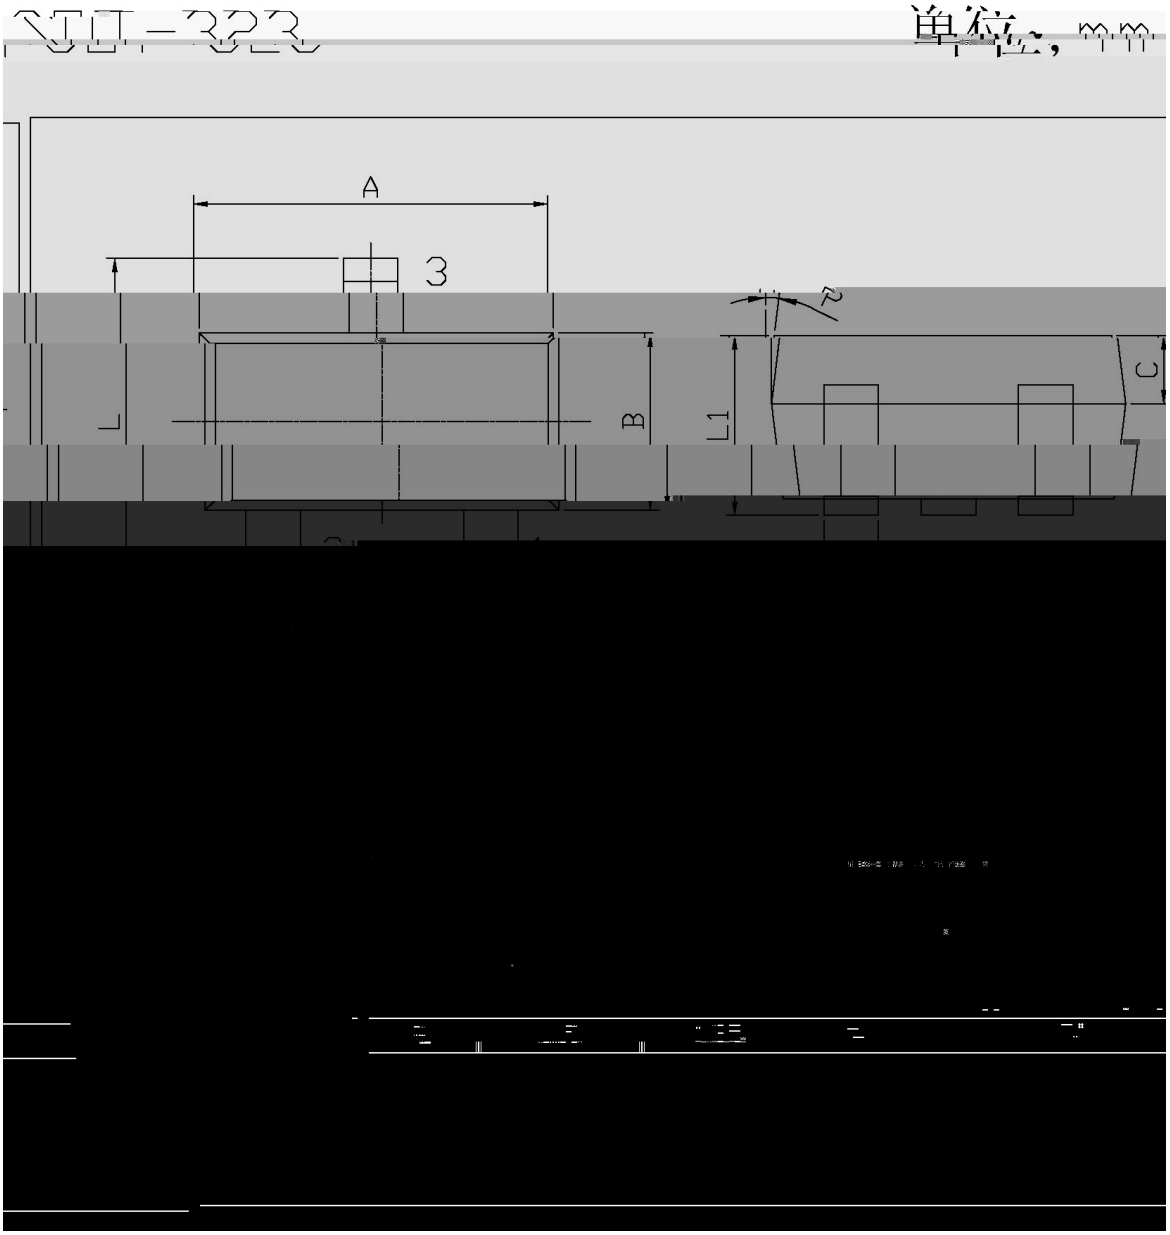

Ł. ĽŸ / Marking Instructions

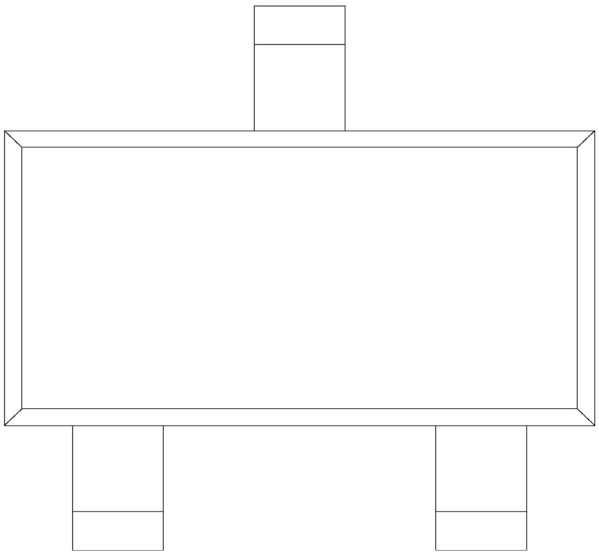

H ¸ WAϒϒ " ˘

ŧħ ʃ ╗ ẘ ´E ⅵ ʃ (ᾢ ʒ) / Wh p shudwxuh Suriloh iru LU Uhior z Vroghulqj+Se0luhh,

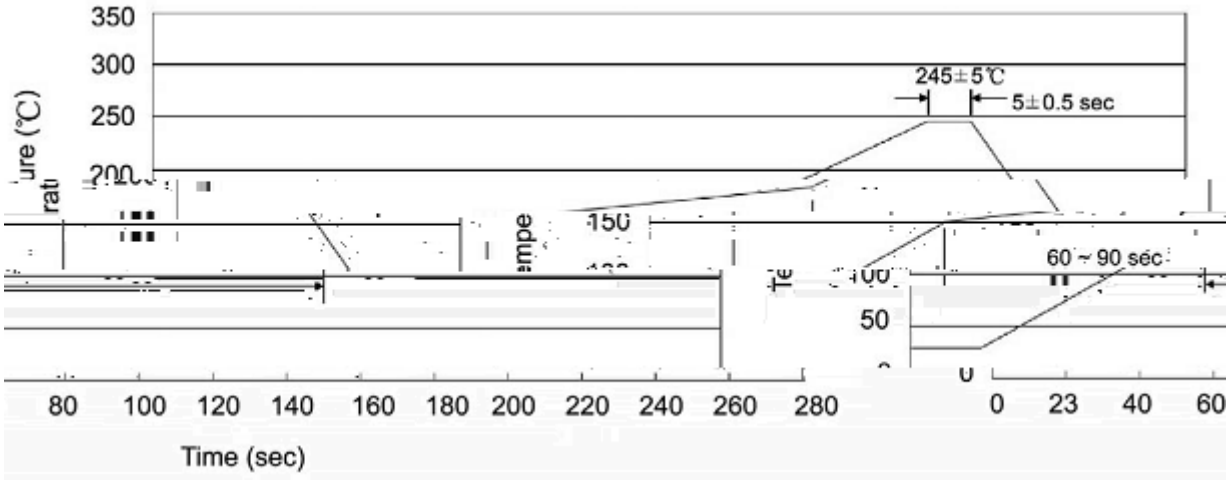

Note:

1 25 150 60 90sec; 1.Preheating:25~150 , Time:60~90sec.

2