/ Revised record

F	2016-3				
G	2019-10-18	1			
H	2019-12-4	2	T		
I	2022-6-13	1	±17 ( ), ±12 ( ) ±17 ( ), ±12 ( )		

/ Descriptions

SOT23-6 TVS

/ Features


4 ESD I/O 0.35pF

/ Applications

ESD USB 2.0 IEC 61000-4-2(ESD) 17 ( ), ±12 ( )

T T T


/ Equivalent Circuit




/ Pinning





/ Marking

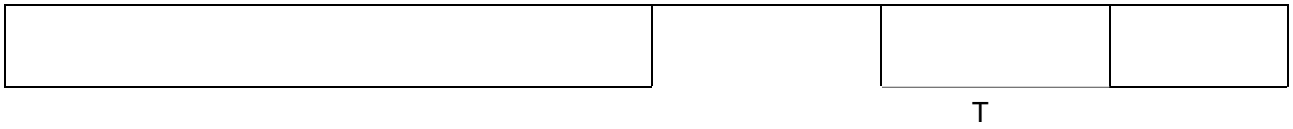

T

/ Electrical Characteristic Curve

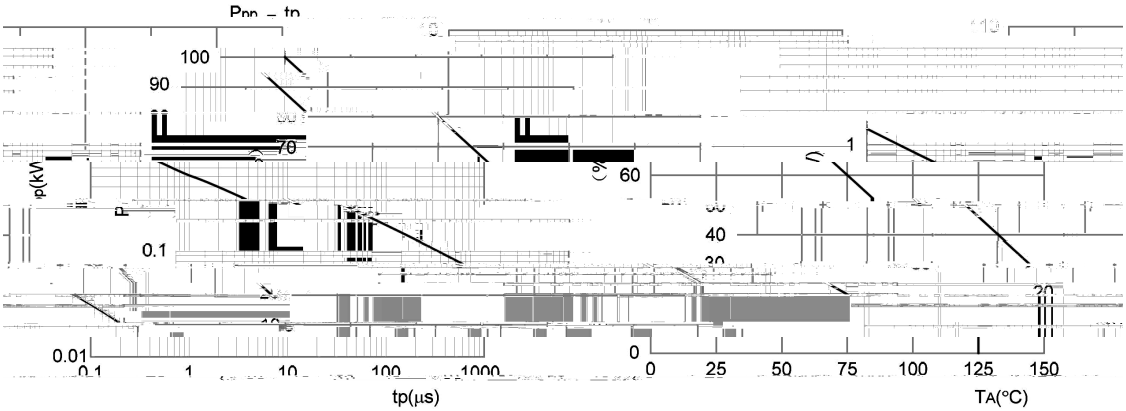


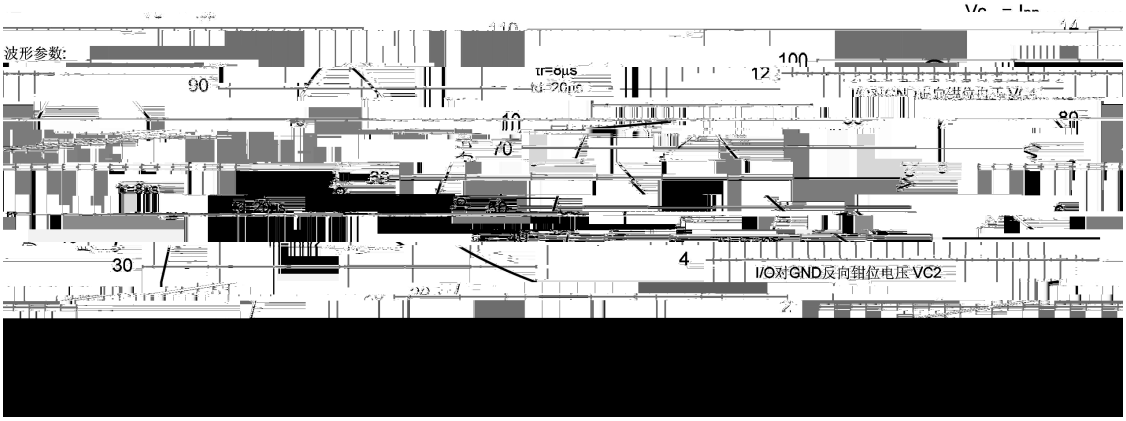

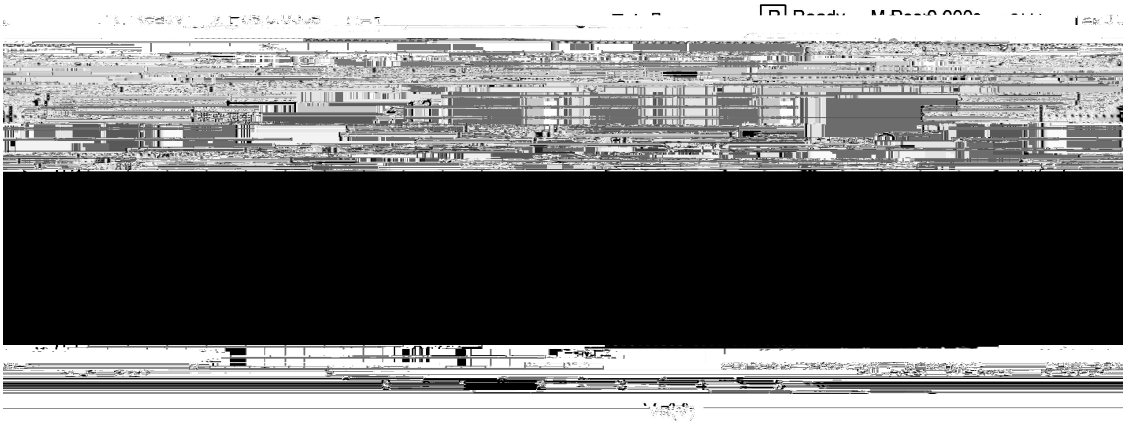

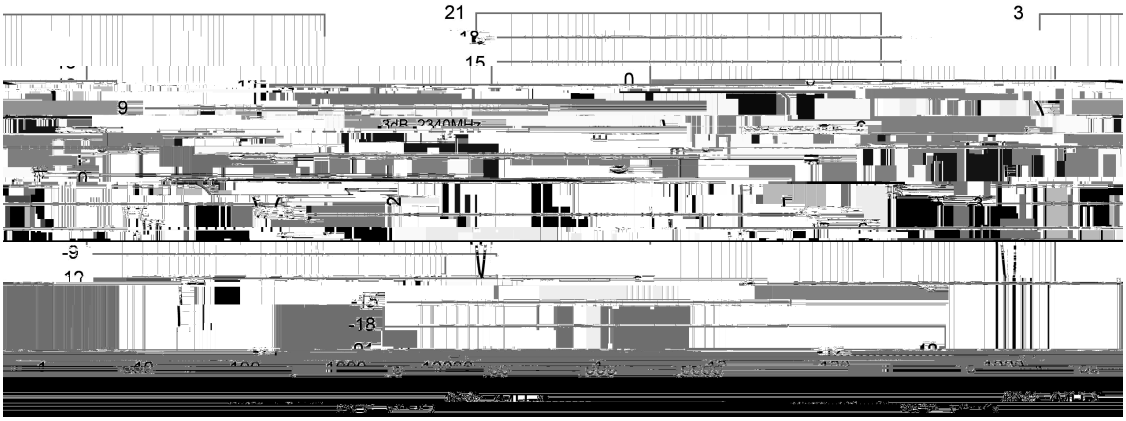

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

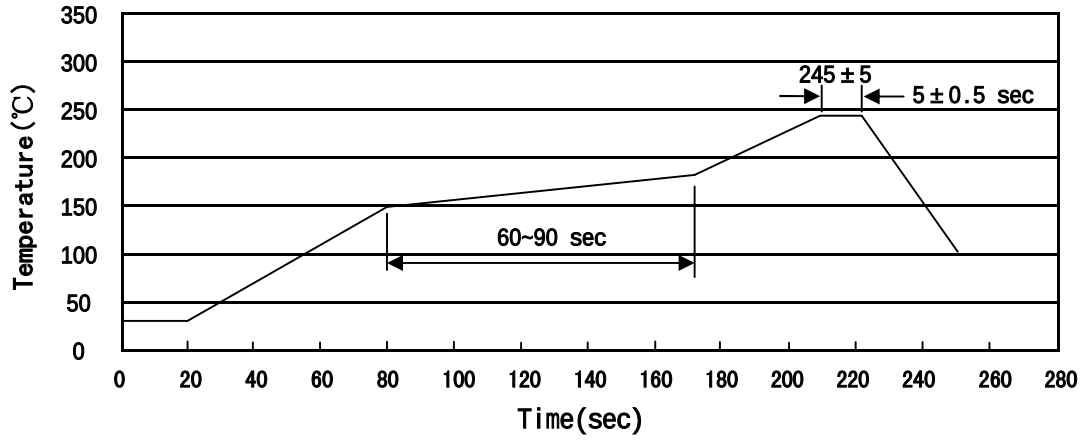

T T T T T ℃

± ± ± ℃ ±

T ℃ T ℃

/ Resistance to Soldering Heat Test Conditions

± ℃ T ±T ± ℃ T ±T

/ Packaging SPEC.

!	" # $					" % & '		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/	Units/Outer Box 只/	Reel	Inner Box (	Outer Box)
SOT23-5/6	3,000	10	30,000	4	120,000	7″ ×8	210×205×205	445×230×435

/ Notices