# US3AB~US3MB

DATA SHEET

## / Descriptions

50V~1000V 3.0A SMB

## / Features


RoHS 2011/65/EU

0

## / Applications

.

## / Equivalent Circuit



## / Pinning



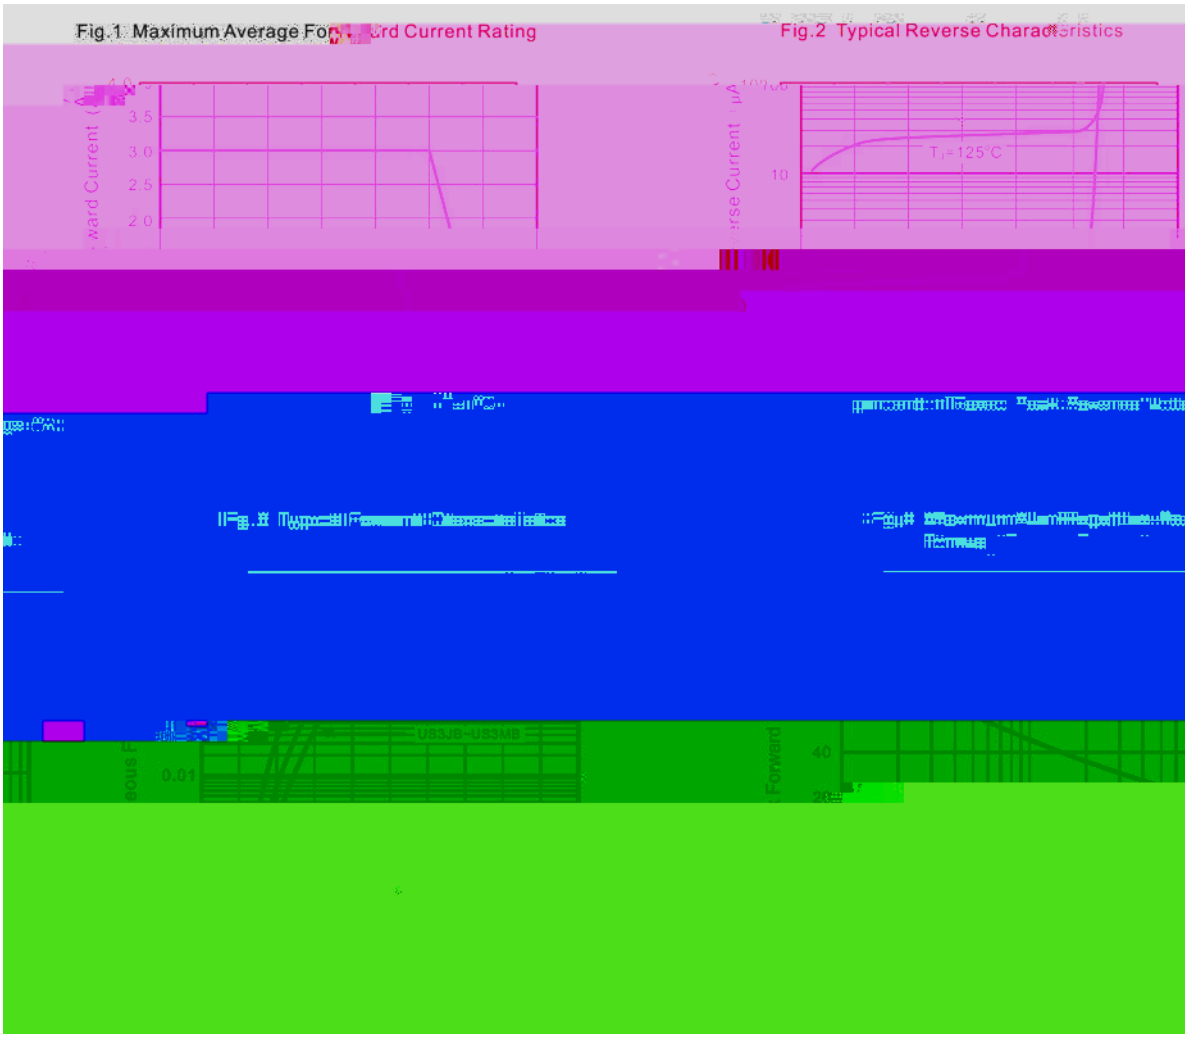

| PIN | DESCRIPTION |
|---|---|
| 1 | Cathode |
| 2 | Anode |




## / Marking

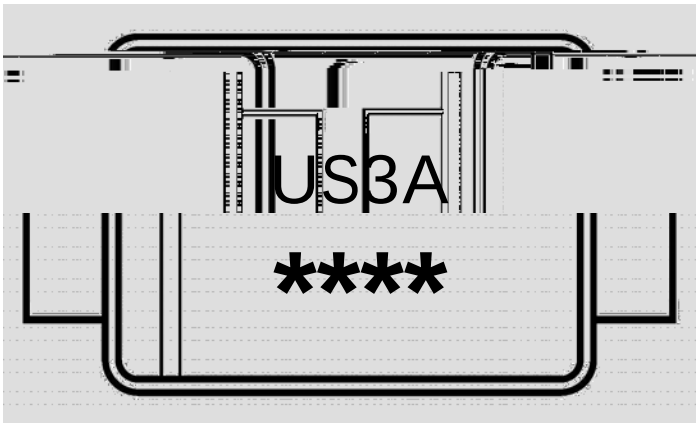
| | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

## / Electrical Characteristic Curve



Ø ¤ = ) ¢

## / Marking Instructions



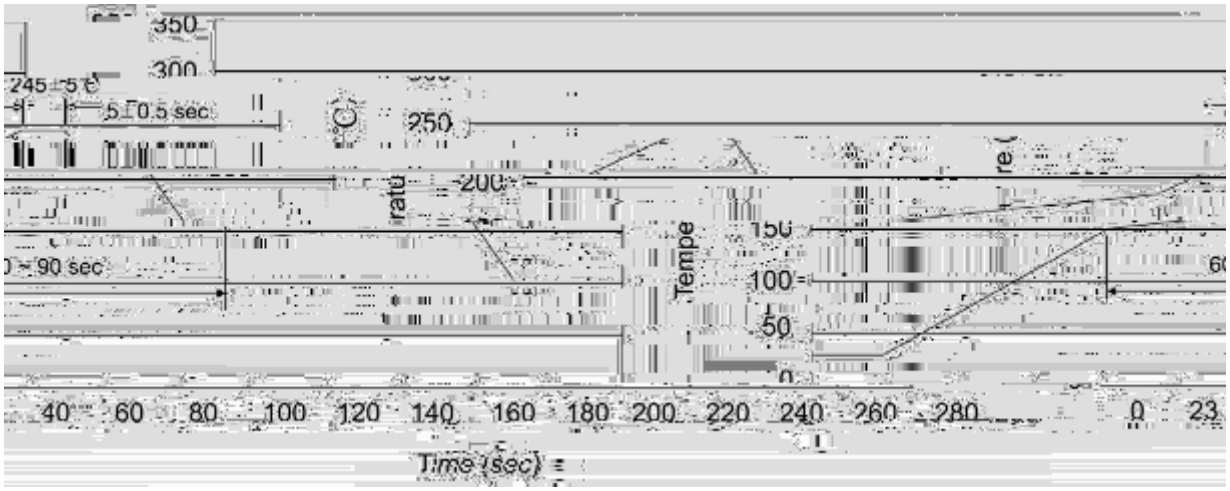

US3A

**** 1 * 3 *

US3A

**** * *

## ( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)




± ± ± ±

## / Resistance to Soldering Heat Test Conditions

± ±